




Serie **SPLIT-BODY ANSI150**

Articolo **762000**

CARBON STEEL

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

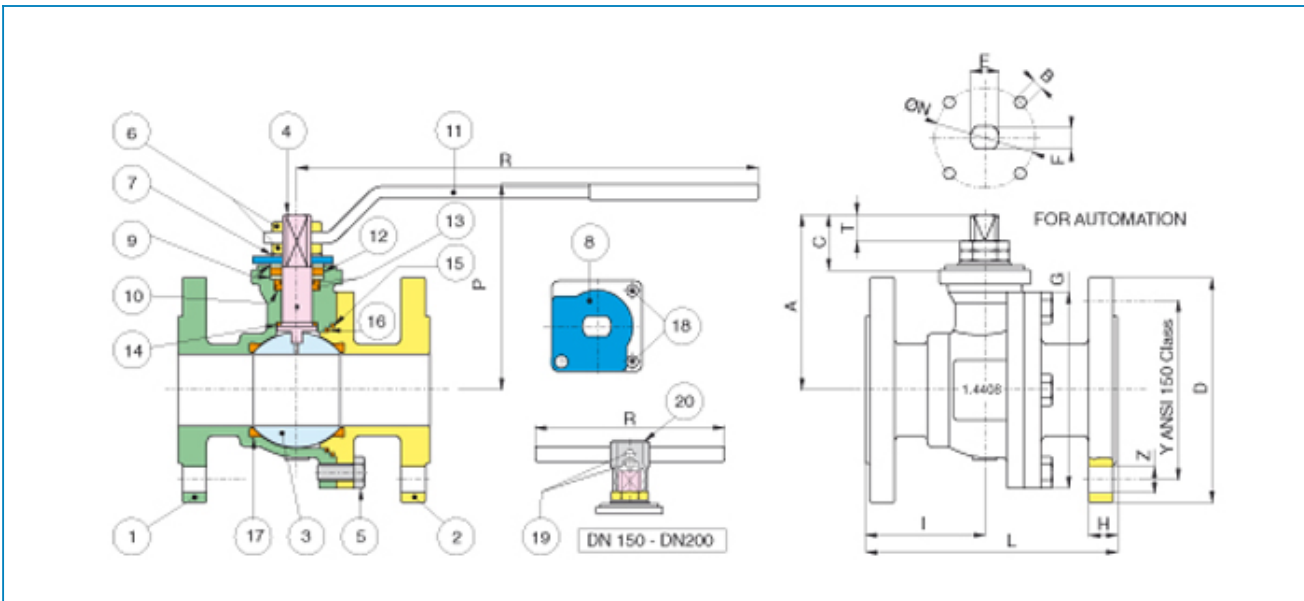

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4-8-12
6	NUT	DN125 DN150 - DN200	1-2
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1 1/2"	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	27,5	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	27,5	M42	30	125-F12	M12	2720	20	124,60
10" *	250	405	362	12 X Ø26	32,2	301,8	533	500	422	1200	353	81	47	M52	38	140-F14	M16	-	10	195,00
12" *	300	485	431,8	12 X Ø26	33,8	353,8	610	560	452	1200	384	81	47	M52	38	140-F14	M16	-	10	254,00
12 X Ø26																				

* TRUNNION ∆p=10 bar