



MINIMATIC® FITTINGS

Push-Quick Fittings

Fittings are easy to install, and provide high flow. Threaded and non-threaded available.

See pages 290 - 298.

Barb Fittings

Fittings are available with 1/16", 3/32" or 1/8" hose barbs, #10-32 thread and 1/8" NPT.

See pages 299 - 306.

Compression Fittings

Join standard size pipe to tubing with a convenient ferrule design.

See page 306.

Nipples & Connectors

Used for coupling various cylinders, valves, fittings and other components together.

See page 307.

Threaded Fittings

Offered with #10-32 and 1/8" NPT threads. "L", "T" and "X" configurations.

See page 308.

Adapters & Reducers

Adapt your fittings to the right positions and threads.

See pages 308 - 309.

Bulkhead Fittings

Provide rigid connection through panels or bulkheads up to 1/2" thick.

See page 310.

For ease in construction of pneumatic logic control and fluid power systems, you will find in the Clippard line an extensive choice of useful fittings. Clippard fittings are designed for the greatest flexibility, practical usefulness and for savings in time, cost and space.



Clippard was the first to develop ports utilizing the #10-32 thread. This thread has become an industry standard in the marketplace. Because of their compact size, #10-32 fittings when properly gasketed and/or sealed with anaerobic sealant, can withstand pressures well beyond those required for pneumatic applications.

Clippard precision fittings will save you time, space, and money when designing versatile, productive, trouble free, pneumatic circuits. Our endless variety of fittings insure that you find just the right "fit" when plumbing pneumatic circuits or assemblies. These fittings are small in size but large in performance, allowing for streamlining of pneumatic assemblies and eliminating the need for larger, more expensive, cumbersome fittings.



Plugs

Offered for use to plug unused openings in fittings, manifolds and more.

See pages 310 - 311.

Mufflers

Provides muffled exhaust for quiet system operation.

See page 312.

Manifolds

Ideal for grouping pneumatic valves and other components in applications where space is limited.

See pages 312 - 314.

Quick Connect Fittings

A body and cap assembly which enables fast and easy connection, and tight shut-off when disconnected.

See pages 315 - 318.

Air Jets

Deliver a concentrated flow of air or liquid to a designated location.

See page 319.

Fittings Kits

A variety of the most commonly used fittings and quick connects to save time and avoid delays.

See pages 320 - 321.

Hose & Tubing

Sizes from 1/8" to 1/2" OD in various materials, colors and styles.

See pages 322 - 327.

Tips & Tools


These are provided throughout this section to assist with designing the most efficient pneumatic systems.

See pages 290, 298 - 299, 301, 309, 311, 318, 322 and 327.





PUSH-QUICK FITTINGS

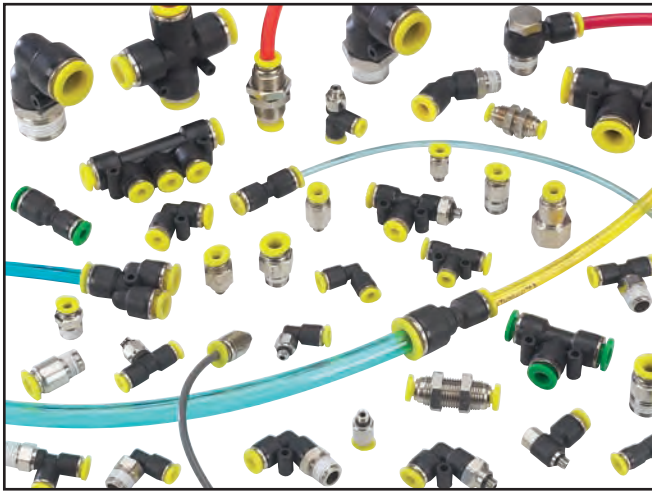

Clippard Push-Quick Fittings provide a simple method of connecting pneumatic components to each other and system piping. They are designed for use with both flexible hose and stiff tubing made of nylon, urethane, polyethylene or polypropylene.

Push-Quick Fittings generally provide higher flows than barbed fittings. The Push-Quick fitting allows full flow through the hose/tubing I.D. with no smaller orifice required as in barb fittings. The chart shows the comparison between barb and push in fittings for various tubing/hose sizes. Push-Quick Fittings are available in nine sizes for 1/8", 5/32", 6 mm, 1/4" and 3/8" O.D. tubing. The 5/32" fittings may also be used with 4 mm O.D. tubing.

Installation of Tubing into fitting

1. Slowly push a clean and perpendicularly cut tubing into the fitting until it comes to a dead stop.
2. Pull the tubing back gently until the Gripper Ring of the fitting grips onto the tubing and has a good seal.

Removal of Tubing from fitting

1. Push in evenly on the two long oval sides of the Release Button.
2. Pull out the tubing while keeping the Release Button depressed.
3. To reuse the tubing; cut off the lodged portion of the previously used tubing evenly and perpendicularly.

Installation of Pipe Fittings with Pre-Applied sealant

1. Tighten fitting by hand, then turn it 2 or 3 turns with a wrench until it reaches the desired torque listed.
2. If the fitting is used and the sealant coating is not in good condition, apply Teflon® sealant tape to the threads.



* 6 mm size fittings have a green release button

Thread Size	#10-32	1/8" NPT, R1/8	1/4" NPT, R1/4	3/8" NPT	1/2" NPT
Torque lb. - ft.	1.0 - 1.5	5.0 - 6.5	8.5 - 10.0	16.0 - 17.5	20 - 21.5

Tubing Material	Polyurethane	Polyethylene	Polypropylene	Nylon
Specified Size	+/- 0.005"	+/- 0.004"	+/- 0.004"	+/- 0.004"
Hardness (Durometer)	Shore A85 or higher	Shore D 44 or higher	Shore D 44 or higher	Shore D 44

see pages 322 through 327 for hose and tubing

Pressure Range: 0 - 150 psig @ 130°F

Vacuum: 0 to 29.5" Hg

Temperature Range: 32 to 140°F


Media: Air, Non-corrosive water

Tube Pull Out Force: >20 lb. @ 75°F (non-pressurized)

Burst Pressure: 350 psig @ 75°F

Materials: Body - Plastic Resin
Metal Stud - Nickel Plated Brass
Gripper Ring - Stainless Steel
Seals - Buna-N

Barb vs Push-Quick Fittings
Flow Comparison @ 100 psig

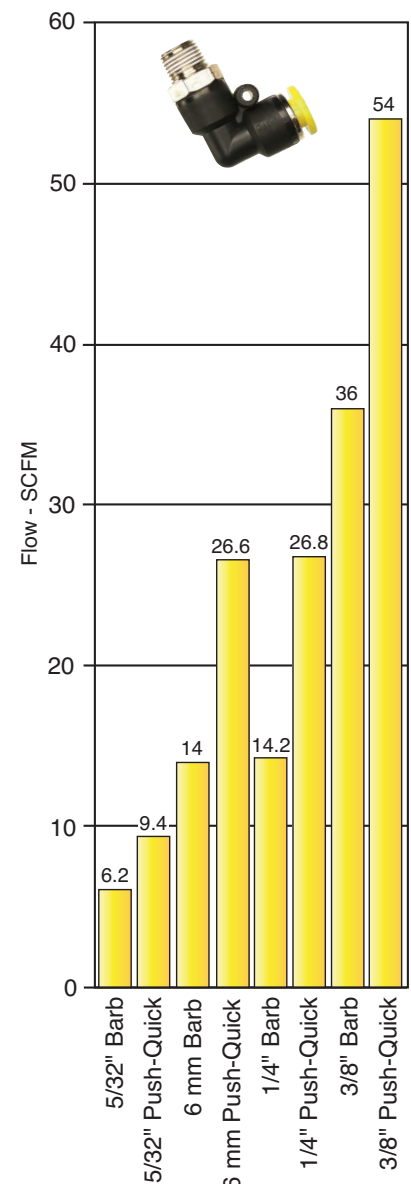

P Q - □ □ □ □ □ □

Fitting Type

BC - Bulkhead Connector
BT - Branch Tee
BU - Bulkhead Union
CC - Compact Male Conn.
CU - Cross Union
EE - Extended Elbow
ER - Elbow Reducer
EU - Elbow Union
FC - Female Connector
FE - Female Elbow

MA - Male Angle Connector
MC - Male Connector
ME - Male Elbow
MM - Male Manifold
MU - Manifold Union
PE - Plug-In Elbow
PG - Plug
RB - Reduced Branch
RT - Run Tee

RU - Reduced Union
SC - Stem Coupler
SE - Stack Elbow
SR - Stem Reducer
SU - Straight Union
TU - Tee Union
TR - Tube Reducer
UE - Universal Elbow
YC - Y Connector
YU - Y Union

Tubing Size (O.D.)

04 - 1/8" (0.125")
04M - 4 mm (0.157")
05 - 5/32" (0.156")
06M - 6 mm (0.236")
08 - 1/4" (0.250")
08M - 8 mm (0.313")
10 - 5/16" (0.313")
12 - 3/8" (0.375")
16 - 1/2" (0.500")

Thread Size

N - #10-32
5 - M5 Thd.
6 - M6 Thd.
P - 1/8" NPT
R - R1/8
Q - 1/4" NPT
2 - R1/4
W - 3/8" NPT
3 - R3/8
Z - 1/2" NPT

Threaded Fittings



Female Connector
Page 292



Male Compact Connector
Page 292



Male Connector
Page 292



Bulkhead Connector
Page 296



Male Angle Connector
Page 295



Y Connector
Page 294



Female Elbow
Page 294



Male Elbow
Page 293



Extended Elbow
Page 294



Universal Elbow
Page 294



Stack Elbow
Page 295



Run Tee
Page 293



Branch Tee
Page 293



Manifold Mount
Page 295

Non-Threaded Fittings



Straight Union
Page 296



Reduced Union
Page 297



Elbow Union
Page 296



Tee Union
Page 296



Y Union
Page 297



Cross Union
Page 296



Manifold Union
Page 296



Bulkhead Union
Page 296



Reduced Branch
Page 297



Elbow Reducer
Page 297



Tube Reducer
Page 297



Plug-In Elbow
Page 297



Tee Reducer
Page 297



Stem Reducer
Page 298




Stem Coupler
Page 298



PUSH-QUICK FITTINGS

Female Connector


(10/pack)



Tubing	Thread "T"	Part No.	"A"	"H" Hex.
5/32"	#10-32	PQ-FC05N	0.905"	7/16"
	1/8" NPT	PQ-FC05P	1.080"	9/16"
4 mm*	M5 x 0.8	PQ-FC04M5	0.905"	12 mm
	R1/8	PQ-FC04MR	1.080"	14 mm
6 mm*	R1/8	PQ-FC06MR	1.080"	14 mm
	R1/4	PQ-FC06M2	1.100"	17 mm
1/4"	1/8" NPT	PQ-FC08P	1.080"	9/16"
	1/4" NPT	PQ-FC08Q	1.220"	11/16"
5/16"	1/8" NPT	PQ-FC10P	1.170"	11/16"
	1/4" NPT	PQ-FC10Q	1.250"	11/16"
	3/8" NPT	PQ-FC10W	1.260"	7/8"
8 mm*	R1/8	PQ-FC08MR	1.170"	17 mm
	R1/4	PQ-FC08M2	1.170"	17 mm
	R3/8	PQ-FC08M3	1.250"	19 mm
3/8"	1/4" NPT	PQ-FC12Q	1.380"	7/8"
	3/8" NPT	PQ-FC12W		

Male Connector


(10/pack)



Tubing	Thread "T"	Part No.	"A"	"H" Hex.
1/8"	#10-32	PQ-MC04N	0.899"	7/16"
	1/8" NPT	PQ-MC04P	0.836"	
	1/4" NPT	PQ-MC04Q	0.920"	
5/32"	#10-32	PQ-MC05N	0.899"	7/16"
	1/8" NPT	PQ-MC05P	0.836"	7/16"
	1/4" NPT	PQ-MC05Q	0.920"	9/16"
4 mm*	M5 x 0.8	PQ-MC04M5	0.899"	10 mm
	R1/8	PQ-MC04MR	0.836"	
6 mm*	M5 x 0.8	PQ-MC06M5	0.948"	12 mm
	R1/8	PQ-MC06MR	0.878"	12 mm
	R1/4	PQ-MC06M2	0.873"	14 mm
1/4"	#10-32	PQ-MC08N	0.913"	1/2"
	1/8" NPT	PQ-MC08P	0.913"	1/2"
	1/4" NPT	PQ-MC08Q	0.965"	9/16"
	3/8" NPT	PQ-MC08W	0.965"	11/16"
5/16"	1/8" NPT	PQ-MC10P	1.090"	9/16"
	1/4" NPT	PQ-MC10Q	1.050"	9/16"
	3/8" NPT	PQ-MC10W	1.060"	11/16"
8 mm*	M5 x 0.8	PQ-MC08M5	1.030"	14 mm
	R1/8	PQ-MC08MR	1.030"	14 mm
	R1/4	PQ-MC08M2	1.060"	14 mm
	R3/8	PQ-MC08M3	0.950"	17 mm
3/8"	1/8" NPT	PQ-MC12P	1.280"	11/16"
	1/4" NPT	PQ-MC12Q	1.342"	11/16"
	3/8" NPT	PQ-MC12W	1.241"	11/16"
	1/2" NPT	PQ-MC12Z	1.240"	7/8"
1/2"	1/4" NPT	PQ-MC16Q	1.342"	11/16"
	3/8" NPT	PQ-MC16W	1.241"	11/16"
	1/2" NPT	PQ-MC16Z	1.240"	7/8"

Male Compact Connector

(10/pack)




Tubing	Thread "T"	Part No.	"A"	"D" Dia.	"H" Hex.
1/8"	#10-32	PQ-CC04N	0.880"	0.410"	5/64"
	1/8" NPT	PQ-CC04P	0.860"		3/32"
5/32"	#10-32	PQ-CC05N	0.890"	0.400"	5/64"
	1/8" NPT	PQ-CC05P	0.840"		3/32"
1/4"	#10-32	PQ-CC08N	0.910"	0.470"	5/64"
	1/8" NPT	PQ-CC08P	0.910"		5/32"
	1/4" NPT	PQ-CC08Q	0.970"		5/32"
3/8"	1/4" NPT	PQ-CC12Q	1.340"	0.670"	7/32"
	3/8" NPT	PQ-CC12W	1.240"		5/16"

* Fittings have a green release button.

Note: Fittings with pipe thread NPT, R1/8, R1/4 and R3/8 are supplied with pre-applied sealant.

Run Tee


(5/pack)

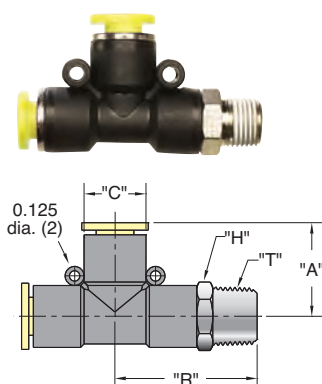

Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.	"R"
1/8"	1/8" NPT	PQ-RT04P	0.722"	0.410"	7/16"	0.980"
5/32"	#10-32	PQ-RT05N	0.722"	0.410"	7/16"	0.900"
	1/8" NPT	PQ-RT05P				0.980"
4 mm*	M5 x 0.8	PQ-RT04M5	0.722"	0.410"	10 mm	0.900"
	R1/8	PQ-RT04MR				0.980"
6 mm*	M5 x 0.8	PQ-RT06M5			12 mm	1.030"
	R1/8	PQ-RT06MR	0.830"	0.524"	12 mm	1.100"
	R1/4	PQ-RT06M2			14 mm	1.140"
1/4"	#10-32	PQ-RT08N			1/2"	1.030"
	1/8" NPT	PQ-RT08P	0.840"	0.524"	1/2"	1.100"
	1/4" NPT	PQ-RT08Q			9/16"	1.230"
5/16"	1/8" NPT	PQ-RT10P			9/16"	1.100"
	1/4" NPT	PQ-RT10Q	0.880"	0.580"	9/16"	1.230"
	3/8" NPT	PQ-RT10W			11/16"	1.290"
8 mm*	R1/8	PQ-RT08MR				
	R1/4	PQ-RT08M2	0.880"	0.580"	14 mm	1.290"
	R3/8	PQ-RT08M3				
3/8"	1/8" NPT	PQ-RT12P				1.380"
	1/4" NPT	PQ-RT12Q	1.100"	0.720"	11/16"	1.470"
	3/8" NPT	PQ-RT12W				1.500"

Branch Tee


(5/pack)

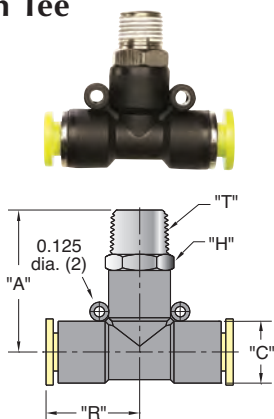

Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.	"R"
5/32"	#10-32	PQ-BT05N	0.900"	0.410"	7/16"	0.722"
	1/8" NPT	PQ-BT05P	0.980"			
4 mm*	M5 x 0.8	PQ-BT04M5	0.900"	0.410"	10 mm	0.722"
	R1/8	PQ-BT04MR	0.980"			
6 mm*	M5 x 0.8	PQ-BT06M5	1.030"		12 mm	
	R1/8	PQ-BT06MR	1.100"	0.524"	12 mm	0.830"
	R1/4	PQ-BT06M2	1.140"		14 mm	
1/4"	#10-32	PQ-BT08N	1.030"		1/2"	
	1/8" NPT	PQ-BT08P	1.100"	0.524"	1/2"	0.840"
	1/4" NPT	PQ-BT08Q	1.230"		9/16"	
5/16"	1/8" NPT	PQ-BT10P	1.100"		9/16"	0.880"
	1/4" NPT	PQ-BT10Q	1.230"	0.580"		
8 mm*	R1/8	PQ-BT08MR				
	R1/4	PQ-BT08M2	1.290"	0.580"	14 mm	0.880"
	R3/8	PQ-BT08M3				
3/8"	1/8" NPT	PQ-BT12P	1.290"			
	1/4" NPT	PQ-BT12Q	1.470"	0.720"	11/16"	1.100"
	3/8" NPT	PQ-BT12W	1.500"			

Male Elbow

(10/pack)

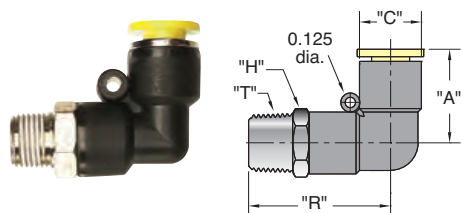

Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.	"R"
1/8"	#10-32	PQ-ME04N				0.900"
	1/8" NPT	PQ-ME04P	0.722"	0.410"	7/16"	0.980"
5/32"	#10-32	PQ-ME05N				0.900"
	1/8" NPT	PQ-ME05P	0.722"	0.410"	7/16"	0.980"
	1/4" NPT	PQ-ME05Q				1.130"
4 mm*	M5 x 0.8	PQ-ME04M5	0.722"	0.410"	10 mm	0.900"
	R1/8	PQ-ME04MR				0.980"
6 mm*	M5 x 0.8	PQ-ME06M5			12 mm	1.030"
	R1/8	PQ-ME06MR	0.830"	0.524"	12 mm	1.100"
	R1/4	PQ-ME06M2			14 mm	1.140"
1/4"	#10-32	PQ-ME08N			1/2"	1.030"
	1/8" NPT	PQ-ME08P	0.840"	0.524"	1/2"	1.100"
	1/4" NPT	PQ-ME08Q			9/16"	1.230"
	3/8" NPT	PQ-ME08W			11/16"	1.290"
5/16"	1/8" NPT	PQ-ME10P			9/16"	1.100"
	1/4" NPT	PQ-ME10Q	0.880"	0.580"	9/16"	1.230"
	3/8" NPT	PQ-ME10W			11/16"	1.290"
8 mm*	R1/8	PQ-ME08MR				
	R1/4	PQ-ME08M2	0.880"	0.580"	14 mm	1.290"
	R3/8	PQ-ME08M3				
3/8"	1/8" NPT	PQ-ME12P			11/16"	1.350"
	1/4" NPT	PQ-ME12Q			11/16"	1.470"
	3/8" NPT	PQ-ME12W	1.100"	0.720"	11/16"	1.500"
	1/2" NPT	PQ-ME12Z			7/8"	1.600"
1/2"	1/4" NPT	PQ-ME16Q				1.550"
	3/8" NPT	PQ-ME16W	1.160"	0.850"	7/8"	1.580"
	1/2" NPT	PQ-ME16Z				1.670"


* Fittings have a green release button.
Note: Fittings with pipe thread NPT, R1/8, R1/4 and R3/8 are supplied with pre-applied sealant.



PUSH-QUICK FITTINGS

Female Elbow


(5/pack)



Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.	"R"
1/8"	#10-32 1/8" NPT	PQ-FE04N PQ-FE04P	0.830" 0.950"	0.410"	7/16" 1/2"	0.720"
5/32"	#10-32 1/8" NPT 1/4" NPT	PQ-FE05N PQ-FE05P PQ-FE05Q	0.850" 0.990" 0.980"	0.410"	7/16" 7/16" 9/16"	0.722"
1/4"	#10-32 1/8" NPT 1/4" NPT	PQ-FE08N PQ-FE08P PQ-FE08Q	0.940" 1.030" 1.190"	0.524"	7/16" 7/16" 9/16"	0.840"
5/16"	1/8" NPT 1/4" NPT	PQ-FE10P PQ-FE10Q	1.120" 1.220"	0.580"	7/16" 9/16"	0.900"
3/8"	1/4" NPT 3/8" NPT	PQ-FE12Q PQ-FE12W	1.390" 1.420"	0.720"	11/16" 7/8"	1.100"

Extended Elbow


(5/pack)



Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.	"R"
5/32"	#10-32 1/8" NPT	PQ-EE05N PQ-EE05P	0.722"	0.410"	7/16"	1.360" 1.480"
1/4"	1/8" NPT 1/4" NPT 1/2" NPT	PQ-EE08P PQ-EE08Q PQ-EE08W	0.840"	0.524"	1/2" 9/16" 11/16"	1.640" 1.820" 1.940"
5/16"	1/8" NPT 1/4" NPT 3/8" NPT	PQ-EE10P PQ-EE10Q PQ-EE10W	0.900"	0.580"	1/2" 9/16" 11/16"	1.810" 1.900" 2.010"
3/8"	1/4" NPT 3/8" NPT 1/2" NPT	PQ-EE12Q PQ-EE12W PQ-EE12Z	1.100"	0.720"	9/16" 11/16" 7/8"	2.170" 2.170" 2.560"
1/2"	3/8" NPT 1/2" NPT	PQ-EE16W PQ-EE16Z	1.160"	0.850"	11/16" 7/8"	2.470" 2.600"

Universal Elbow


(5/pack)



Tubing	Thread "T"	Part No.	"A"	"C"	"R"	"H" Hex.
5/32"	#10-32	PQ-UE05N	0.820"	0.410"	0.790"	5/16"
	1/8" NPT	PQ-UE05P	0.920"		1.020"	7/16"
4 mm*	M5 x 0.8	PQ-UE04M5	0.831"	0.410"	0.790"	8 mm
	R1/8	PQ-UE04MR	0.921"		0.970"	10 mm
6 mm*	M5 x 0.8	PQ-UE06M5	0.976"	0.953"	0.790"	12 mm
	R1/8	PQ-UE06MR		0.524"	0.970"	12 mm
	R1/4	PQ-UE06M2		1.059"	1.140"	14 mm
1/4"	#10-32	PQ-UE08N	0.990"	0.940"	0.790"	1/2"
	1/8" NPT	PQ-UE08P		0.524"	1.020"	1/2"
	1/4" NPT	PQ-UE08Q		1.120"	1.150"	9/16"
5/16"	1/8" NPT	PQ-UE10P	1.120"	1.020"	9/16"	9/16"
	1/4" NPT	PQ-UE10Q		1.150"	9/16"	9/16"
	3/8" NPT	PQ-UE10W		1.430"	11/16"	11/16"
8 mm*	R1/8	PQ-UE08MR	1.120"	1.000"	14 mm	
	R1/4	PQ-UE08M2		1.140"		
	R3/8	PQ-UE08M3		1.410"		
3/8"	1/4" NPT	PQ-UE12Q	1.320"	0.720"	1.180"	11/16"
	3/8" NPT	PQ-UE12W			1.430"	

Y Connector

(5/pack)




Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.
1/8"	#10-32 1/8" NPT	PQ-YC04N PQ-YC04P	1.630" 1.660"	0.410"	7/16"
5/32"	#10-32 1/8" NPT	PQ-YC05N PQ-YC05P	1.630" 1.660"	0.410"	7/16"
1/4"	#10-32 1/8" NPT 1/4" NPT	PQ-YC08N PQ-YC08P PQ-YC08Q	1.690" 1.770" 1.830"	0.524"	1/2" 1/2" 9/16"
5/16"	1/8" NPT 1/4" NPT	PQ-YC10P PQ-YC10Q	1.830" 1.900"	0.580"	9/16"
3/8"	1/4" NPT 3/8" NPT	PQ-YC12Q PQ-YC12W	2.340" 2.400"	0.720"	11/16"
1/2"	3/8" NPT 1/2" NPT	PQ-YC16W PQ-YC16Z	2.500" 2.600"	0.850"	7/8"

* Fittings have a green release button.

Note: Fittings with pipe thread NPT, R1/8, R1/4 and R3/8 are supplied with pre-applied sealant.

Male Angle Connector


(10/pack)



Tubing	Thread "T"	Part No.	"H" Hex.	"A"	"C"
1/8"	#10-32 1/8" NPT	PQ-MA04N PQ-MA04P	7/16"	1.454" 1.474"	0.410"
5/32"	#10-32 1/8" NPT	PQ-MA05N PQ-MA05P	7/16"	1.454" 1.474"	0.410"
4 mm*	M5 x 0.8 R1/8	PQ-MA04M5 PQ-MA04MR	10 mm	1.454" 1.474"	0.410"
6 mm*	M5 x 0.8 R1/8 R1/4	PQ-MA06M5 PQ-MA06MR PQ-MA06M2	12 mm 10 mm 14 mm	1.556" 1.556" 1.616"	0.520"
1/4"	#10-32 1/8" NPT 1/4" NPT 3/8" NPT	PQ-MA08N PQ-MA08P PQ-MA08Q PQ-MA08W	1/2" 1/2" 9/16" 11/16"	1.620" 1.620" 1.682" 1.722"	0.520"
5/16"	1/8" NPT 1/4" NPT	PQ-MA10P PQ-MA10Q	9/16"	1.800"	0.580"
3/8"	1/8" NPT 1/4" NPT 3/8" NPT	PQ-MA12P PQ-MA12Q PQ-MA12W	11/16"	1.823" 1.923" 1.943"	0.720"
1/2"	1/4" NPT 3/8" NPT 1/2" NPT	PQ-MA16Q PQ-MA16W PQ-MA16Z	7/8"	1.965" 2.125" 2.195"	0.830"

Stack Elbow


(5/pack)



Tubing	Thread "T"	Part No.	"A"	"C"	"R"	"H" Hex.
5/32"	#10-32 1/8" NPT	PQ-SE05N PQ-SE05P	0.980" 1.095"	0.410"	1.435"	5/16" 5/16"
1/4"	#10-32 1/8" NPT 1/4" NPT	PQ-SE08N PQ-SE08P PQ-SE08Q	1.165" 1.200" 1.365"	0.524"	2.250" 2.250" 2.600"	1/2" 1/2" 11/16"
5/16"	1/4" NPT 3/8" NPT	PQ-SE10Q PQ-SE10W	1.425" 1.570"	0.580"	2.600" 2.900"	11/16" 3/4"
3/8"	1/4" NPT 3/8" NPT	PQ-SE12Q PQ-SE12W	1.625" 1.690"	0.720"	2.530" 2.970"	11/16" 3/4"
1/2"	3/8" NPT 1/2" NPT	PQ-SE16W PQ-SE16Z	1.740" 1.950"	0.850"	2.970" 3.160"	3/4" 1"

Manifold Mount

(5/pack)

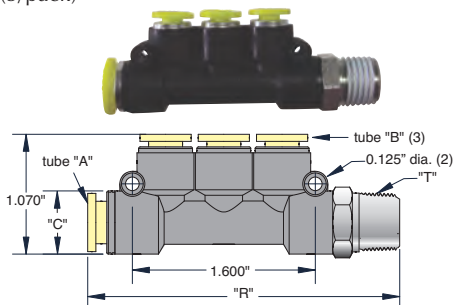

Tube "A"	Tube "B"	Thread "T"	Part No.	"C"	"R"
1/4"	5/32"	1/8" NPT	PQ-MM0805P	0.524"	2.665"
5/16"	1/4"	1/4" NPT	PQ-MM1008Q	0.580"	2.820"

* Fittings have a green release button.


Note: Fittings with pipe thread NPT, R1/8, R1/4 and R3/8 are supplied with pre-applied sealant.



PUSH-QUICK FITTINGS

Bulkhead Connector


(5/pack)



Tubing	Thread "T"	Part No.	"A"	Thread "M"	"H" Hex.
1/8"	1/8" NPT	PQ-BC04P	1.052"	M12x1	9/16"
5/32"	1/8" NPT	PQ-BC05P	1.052"	M12x1	9/16"
4 mm*	R1/8	PQ-BC04MR	1.052"	M12x1	14 mm
6 mm*	R1/8	PQ-BC06MR	1.080"	M14x1	17 mm
	R1/4	PQ-BC06M2	1.150"		
1/4"	1/8" NPT	PQ-BC08P	1.084"	M14x1	11/16"
	1/4" NPT	PQ-BC08Q	1.209"		
5/16"	1/8" NPT	PQ-BC10P	1.150"	M16x1	11/16"
	1/4" NPT	PQ-BC10Q	1.195"		
8 mm*	R1/8	PQ-BC08MR	1.125"	M16x1	17 mm
	R1/4	PQ-BC08M2	1.170"		
3/8"	1/4" NPT	PQ-BC12Q	1.400"	M20x1	7/8"
	3/8" NPT	PQ-BC12W	1.415"		
1/2"	1/2" NPT	PQ-BC16Z	1.525"	M22x1	1"

Bulkhead Union


(5/pack)



Tubing	Part No.	"A"	Thread "M"	"H" Hex.
1/8"	PQ-BU04	0.415"	M12 x 1	14 mm
5/32"	PQ-BU05	1.370"	M12 x 1	5/8"
6 mm*	PQ-BU06M	1.390"	M14 x 1	17 mm
1/4"	PQ-BU08	1.421"	M14 x 1	3/4"
5/16"	PQ-BU10	1.610"	M16 x 1	3/4"
3/8"	PQ-BU12	1.723"	M20 x 1	15/16"
1/2"	PQ-BU16	1.770"	M22 x 1	1"

Straight Union


(10/pack)



Tubing	Part No.	"A"	"C"
1/8"	PQ-SU04	1.240"	0.410"
5/32"	PQ-SU05	1.239"	0.410"
6 mm*	PQ-SU06M	1.500"	0.524"
1/4"	PQ-SU08	1.500"	0.524"
5/16"	PQ-SU10	1.540"	0.580"
3/8"	PQ-SU12	1.851"	0.720"
1/2"	PQ-SU16	1.810"	0.850"

Elbow Union


(10/pack)



Tubing	Part No.	"A"	"C"
1/8"	PQ-EU04	0.710"	0.410"
5/32"	PQ-EU05	0.722"	0.410"
6 mm*	PQ-EU06M	0.830"	0.524"
1/4"	PQ-EU08	0.840"	0.524"
5/16"	PQ-EU10	0.880"	0.580"
3/8"	PQ-EU12	1.100"	0.720"
1/2"	PQ-EU16	1.130"	0.850"

Tee Union


(10/pack)



Tubing	Part No.	"A"	"B"	"C"
1/8"	PQ-TU04	0.710"	0.656"	0.410"
5/32"	PQ-TU05	0.722"	0.656"	0.410"
6 mm*	PQ-TU06M	0.830"	0.740"	0.524"
1/4"	PQ-TU08	0.840"	0.740"	0.524"
5/16"	PQ-TU10	0.880"	0.800"	0.580"
3/8"	PQ-TU12	1.100"	0.944"	0.720"
1/2"	PQ-TU16	1.130"	1.120"	0.850"

Cross Union

(5/pack)




Tubing	Part No.	"A"	"B"	"C"
1/8"	PQ-CU04	0.710"	0.560"	0.410"
5/32"	PQ-CU05	0.722"	0.656"	0.410"
6 mm*	PQ-CU06M	0.830"	0.740"	0.524"
1/4"	PQ-CU08	0.840"	0.740"	0.524"
5/16"	PQ-CU10	0.880"	0.800"	0.580"
3/8"	PQ-CU12	1.100"	0.944"	0.720"

Note:
Fittings with
pipe thread
NPT, R1/8,
R1/4 and
R3/8 are
supplied
with pre-
applied
sealant.

Manifold Union

(5/pack)




Tubing	Part No.	"A"	"B"	"C"
5/32"	PQ-MU0504	2.312"	0.500"	0.560"
6 mm*	PQ-MU06M05	2.435"	0.531"	0.524"
1/4"	PQ-MU0805	2.435"	0.531"	0.524"
5/16"	PQ-MU1008	2.435"	0.580"	0.580"
3/8"	PQ-MU1208	2.312"	0.562"	0.725"

* Fittings have a green release button

Reduced Union


(10/pack)



Tubing	Part No.	"A"	"C1"	"C2"
5/32"-1/8"	PQ-RU0504	1.230"	0.410"	0.410"
6 mm*-5/32"	PQ-RU06M05	1.367"	0.524"	0.410"
1/4"-1/8"	PQ-RU0804	1.367"	0.524"	0.410"
5/16"-1/4"	PQ-RU1008	1.550"	0.580"	0.524"
3/8"-1/4"	PQ-RU1208	1.666"	0.720"	0.524"
1/2"-3/8"	PQ-RU1612	1.810"	0.850"	0.720"

Y Union


(5/pack)



Tubing	Part No.	"A"	"B"	"C"
1/8"	PQ-YU04	1.340"	0.415"	0.410"
5/32"	PQ-YU05	1.318"	0.517"	0.410"
6 mm*	PQ-YU06M	1.495"	0.531"	0.524"
1/4"	PQ-YU08	1.495"	0.531"	0.524"
5/16"	PQ-YU10	1.495"	0.590"	0.580"
3/8"	PQ-YU12	2.017"	0.720"	0.720"
1/2"	PQ-YU16	2.070"	0.840"	0.840"

Reduced Branch


(5/pack)



Tube "A"	Tube "B"	Part No.	"A"	"B"	"C1"	"C2"
1/8"	5/32"	PQ-RB0504	0.830"	1.340"	0.420"	0.410"
5/32"	1/4"	PQ-RB0805	0.830"	1.390"	0.410"	0.524"
1/4"	5/16"	PQ-RB1008	1.025"	1.670"	0.524"	0.580"
1/4"	3/8"	PQ-RB1208	1.025"	1.780"	0.524"	0.720"
3/8"	1/2"	PQ-RB1612	1.420"	2.050"	0.720"	0.850"

Tee Reducer


(5/pack)



Tube "A"	Tube "B"	Part No.	"A"	"C"	"R"
5/32"	1/8"	PQ-TR0504	0.910"	0.410"	1.385"
1/4"	5/32"	PQ-TR0805	1.050"	0.524"	1.570"
5/16"	1/4"	PQ-TR1008	1.170"	0.580"	1.835"
3/8"	1/4"	PQ-TR1208	1.380"	0.720"	2.160"
1/2"	3/8"	PQ-TR1612	1.600"	0.850"	2.240"

Elbow Reducer


(5/pack)



Tubing	Part No.	"A"	"C"	"D1"	"R"
1/8"	PQ-ER0405	1.480"	0.420"	5/32"	0.710"
5/32"	PQ-ER0508	1.640"	0.410"	1/4"	0.722"
1/4"	PQ-ER0810	1.765"	0.524"	5/16"	0.840"
5/16"	PQ-ER1012	2.020"	0.580"	3/8"	0.880"
3/8"	PQ-ER1216	2.260"	0.720"	1/2"	1.100"

Plug-In Elbow


(5/pack)



Tubing	Part No.	"A"	"C"	"E"	"R"
1/8"	PQ-PE04	1.290"	0.410"	0.328"	0.722"
5/32"	PQ-PE05	1.290"	0.410"	0.328"	0.722"
1/4"	PQ-PE08	1.550"	0.524"	0.370"	0.840"
5/16"	PQ-PE10	1.600"	0.580"	0.430"	0.900"
3/8"	PQ-PE12	1.850"	0.720"	0.472"	1.100"
1/2"	PQ-PE16	1.940"	0.850"	0.570"	1.160"

Tube Reducer (Stem)

(10/pack)



Tubing	Part No.	"A"	"B"	"C"	"D1" Dia.
1/8"	PQ-TRS0405	1.320"	0.690"	0.410"	5/32"
5/32"	PQ-TRS0508	1.400"	0.810"	0.524"	1/4"
1/4"	PQ-TRS0810	1.480"	0.850"	0.580"	5/16"
1/4"	PQ-TRS0812	1.610"	0.990"	0.720"	3/8"
3/8"	PQ-TRS1216	1.730"	0.990"	0.850"	1/2"

* Fittings have a green release button.


Note: Fittings with pipe thread NPT, R1/8, R1/4 and R3/8 are supplied with pre-applied sealant.



PUSH-QUICK FITTINGS

Stem Reducer


(10/pack)




Tubing	Part No.	"A"	"D1"	"D2"
1/8"	PQ-SR0405	1.417"	1/8"	5/32"
5/32"	PQ-SR0508	1.417"	5/32"	1/4"
1/4"	PQ-SR0810	1.535"	1/4"	5/16"
5/16"	PQ-SR1012	1.811"	5/16"	3/8"
3/8"	PQ-SR1216	2.126"	3/8"	1/2"

Stem Coupler

(10/pack)



Tubing	Part No.	"A"	"D1" Dia.
1/8"	PQ-SC04	1.378"	1/8"
5/32"	PQ-SC05	1.378"	5/32"
1/4"	PQ-SC08	1.457"	1/4"



Push-Quick Plugs

Clippard offers a variety of Push-Quick Plugs in sizes to fit 1/8" through 3/8" O.D. tubing. These plastic plugs may be used to plug the port of a Push-Quick Fitting for later use. Used as a temporary


plug, they may later be removed and tubing inserted to connect to an additional line of a circuit.

Part No.	Description	Part No.	Description
PQ-PG04	1/8" O.D. Tube	PQ-PG08	1/4" O.D. Tube
PQ-PG05	5/32" O.D. Tube	PQ-PG10	5/16" O.D. Tube
PQ-PG06M	6 mm O.D. Tube	PQ-PG12	3/8" O.D. Tube


Push-Quick Fitting Adapters

Clippard offers a variety of accessories that are designed for use with Push-Quick Fittings. These include special #10-32 threaded adapters in both male (p/n 11674) and female (p/n 11675) thread configurations and adapters that can be used to plug a Push-Quick fitting.


The threaded adapters insert into Push-Quick Fittings and provide either a male or female thread that can be used to mount any Clippard product with a #10-32 threaded inlet. This allows the direct attachment of the product to a Push-Quick Fitting without hoses or additional fittings.

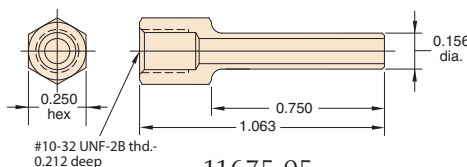


[11675-05](#)
5/32" O.D. Tube

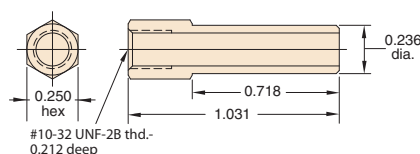

[11675-08](#)
1/4" O.D. Tube

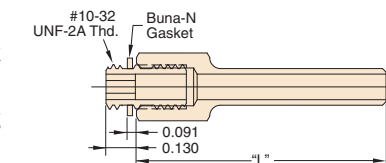

Part No.	"L"	Tube Size
11674-05	1.063"	5/32" OD
11674-08	1.031"	1/4" OD
11674-12	1.218"	3/8" OD

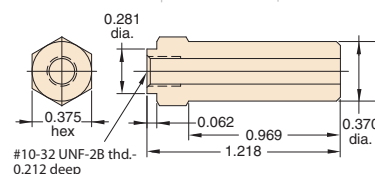


[11675-12](#)
3/8" O.D. Tube

Figure 1 shows an [MAV-3](#) 3-Way Valve connected to a [PQ-RT05P](#) Run Tee using a [11674-05](#) Adapter. In this example, the Run Tee is connected to a 1/8" NPT supply pipe.

Figure 2 shows an [IND-1M-WH](#) Pressure Indicator connected to a [PQ-TU08](#) Tee Union using a [11675-08](#) Adapter. If one of the branches of a Push-Quick Fitting is to be used as a temporary pressure gauge port, the PQ-PGXX series of Plugs can be used when the gauge is not in place. Plugs may also be used if Push-Quick Fitting branches are intended for future additions to the circuit, but have no current need.

Figure 3 shows a [PQ-CU](#) Cross Union with one branch plugged with a PQ-PG08 Plug.

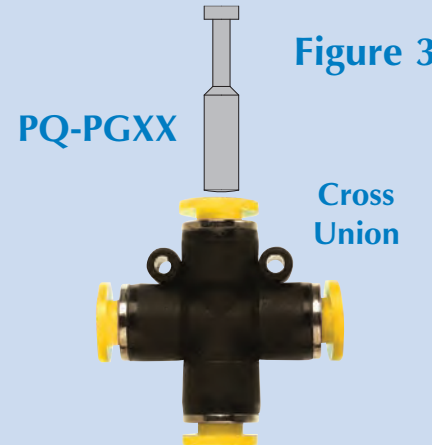



Minimatic barb fittings provide a flexible, easy alternative to ferule and push-to-connect design fittings.

Clippard Minimatic barb fittings are designed to be used with Clippard urethane hose. The flexibility and strength of urethane hose and the compact design of the fittings are ideal for pneumatic applications where convenience and size are considerations. The Minimatic barb fitting used with Clippard urethane hose will provide a leak free connection that will hold well beyond the working pressure of the hose without the need for additional clamps.

Minimatic barb fittings are available in a wide variety of configurations in a number of styles including tee, connectors, crosses, swivel, and universal. Barb sizes can be mixed on the same fitting for applications requiring multiple tubing sizes. The electroless nickel plating of Minimatic barb fittings provides corrosion resistance in applications involving high moisture, while enabling the fittings to retain their original, lustrous appearance. Buna-N gasket included with #10-32 threads except when ordered in bulk.

Features

- Miniature size provides low profile
- Multiple configurations for every need
- Brass or Brass Electroless nickel plating
- Available with 1/16", 3/32" or 1/8" hose barb
- Available with #10-32 thread and 1/8" NPT
- Holds to the burst pressure of polyurethane hose




Miniature Pneumatic Fittings Poster

Clippard's full-color fittings poster displays hundreds of available fittings including Push-Quick, Barb, Brass, Quick-Connect and more. Also included is an extensive variety of miniature hose and tubing from copper and nylon to flexible polyurethane, vinyl and Buna-N. Sizes include 1/8" c 1/4", 5/32", 6 mm, 8 mm, 3/8" and 1/2" OD in various styles. Call to request a copy.



Single-Barb Fittings

- Allow for easier assembly onto tubing
- Provide less leakage potential and increased pressure performance
- Reduce the need to constantly tighten the assembly
- Provide a single sharp edge allowing the barb to catch onto the tubing for a leak-free connection
- Require less clamp pressure
- Allow tubing to "relax" to its original size which is essential to the assembly and pressure of the connection.

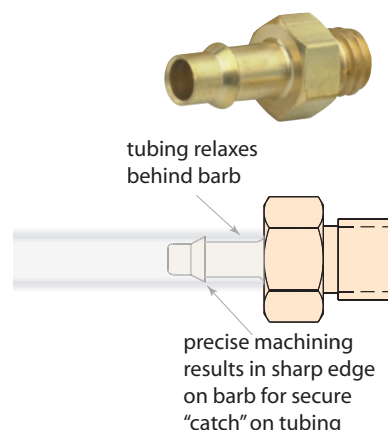




MINIMATIC® BARB CONNECTORS

All fittings are brass unless otherwise noted, i.e. ENP (Electroless Nickel-Plated)

#3-56 to Barb Connectors

#3-56 Male to 1/16" Barb

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	11750-2	0.187"	0.046"

#10-32 to Barb Connectors

#10-32 Male to Single Barb

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.	Material
1/16"	11752-5*	0.312"	0.052"	Brass
3/32"	11752-8*	0.367"	0.073"	Brass
1/8"	11752-4*	0.406"	0.109"	Brass
1/16"	CT2**	0.328"	0.052"	ENP Brass
3/32"	CT3**	0.367"	0.073"	ENP Brass
1/8"	CT4**	0.406"	0.109"	ENP Brass

* Buna-N gasket furnished in pack quantity only

** Gasket pre-installed

#10-32 Male to Multi Barb

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	11752-2	0.437"	0.052"
1/8"	11752-3	0.500"	0.109"
1/8"	11752-1	0.656"	0.090"

Buna-N gasket furnished in pack quantity only

#10-32 Male with Captivated O-Rings to Barb, 1/4" Hex.

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	11792-5	0.313"	0.052"
3/32"	11792-8	0.352"	0.073"
1/8"	11792-4	0.391"	0.109"

Buna-N o-ring furnished installed

#10-32 Male with Captivated O-Rings to Barb, 5/16" Hex.

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	11782-5-ENP	0.481"	0.055"
1/8"	11782-4-ENP	0.512"	0.109"

Buna-N o-ring furnished installed

#10-32 Male Flush Fitting to Barb

(10/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	12841	0.203"	0.052"
3/32"	12843	0.242"	0.073"
1/8"	12842	0.325"	0.104"

Gasket not required; thread sealant required. Tighten by hand for flush mounting in #10-32 threaded holes.

All fittings are brass unless otherwise noted, i.e. ENP (Electroless Nickel-Plated)

ENP #10-32 Male to Barb Swivel

(5/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
3/32"	ST3	0.821"	0.052"
1/8"	ST4	0.891"	0.109"

Gasket included, not installed

#10-32 Male to 1/8" I.D. Barb Swivel

(5/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
1/8"	15045	0.762"	0.109"

Not to be used as a constant rotation junction

TIP Most Clippard #10-32 threaded fittings require no more than 9 inch-pounds of torque to seal. We recommend that this force not be exceeded.

#10-32 Female to Barb


(5/pack)



Barb (ID)	Order No.	"A"	"D" Dia.
1/16"	CF2	0.640"	0.052"
3/32"	CF3	0.640"	0.073"
1/8"	CF4	0.718"	0.109"

ENP #10-32 Female to Barb Swivel

(5/pack)




Barb (ID)	Order No.	"A"	"D" Dia.
3/32"	S3F	0.821"	0.052"
1/8"	S4F	0.871"	0.109"

Barb to Barb Connectors

ENP Barb to Barb


(5/pack)



Barb (ID)	Barb (ID)	Order No.	"R"
1/16"	1/16"	C22	0.656"
1/16"	3/32"	C32	0.684"
1/16"	1/8"	C42	0.734"
3/32"	3/32"	C33	0.712"
3/32"	1/8"	C43	0.762"
1/8"	1/8"	C44	0.812"

ENP Barb to Barb Swivel

(5/pack)



Barb (ID) 1	Barb (ID) 2	Order No.	"A"
3/32"	3/32"	S33	1.052"
1/8"	1/8"	S44	1.183"




MINIMATIC® BARB TO NPT CONNECTORS

All fittings are brass unless otherwise noted, i.e. ENP (Electroless Nickel-Plated)

1/16" Barb to Male NPT


(5/pack)



NPT	Order No.	"A"	"H" Hex.
1/16"	1CI2	0.490"	5/16"
1/8"	2CP2	0.740"	7/16"
1/4"	4CQ2	0.770"	9/16"
3/8"	6CW2	0.890"	11/16"
1/2"	8CZ2	1.020"	13/16"

3/32" Barb to Male NPT


(5/pack)



NPT	Order No.	"A"	"H" Hex.
1/16"	1CI3	0.710"	5/16"
1/8"	2CP3	0.773"	7/16"
1/4"	4CQ3	0.804"	9/16"
3/8"	6CW3	0.929"	11/16"
1/2"	8CZ3	1.054"	13/16"

1/8" Barb to Male NPT


(5/pack)



NPT	Order No.	"A"	"H" Hex.
1/16"	1CI4	0.719"	5/16"
1/8"	2CP4	0.860"	7/16"
1/4"	4CQ4	0.890"	9/16"
3/8"	6CW4	1.020"	11/16"
1/2"	8CZ4	1.140"	13/16"

1/8" Barb to Male NPT


(5/pack)



Barb (ID)	Order No.	"A"
1/8"	11924-1	1.000"

Barb to 1/8" NPT Swivel

(5/pack)




Barb (ID)	Order No.	"A"
1/8"	15055	1.155"

Buna-N o-ring furnished installed

Not to be used as a constant rotation junction

ENP 1/8" NPT Swivel


(5/pack)



Barb (ID)	Order No.	"A"
1/8"	S4N	1.103"

1/4" Barb to Male NPT Flush Fittings

(5/pack)




Barb (ID)	Order No.	"A"	NPT
1/8"	12844*	0.625"	1/8"
1/4"	12845*	0.625"	1/4"

** Requires thread sealant. Threads specifically designed to go flush into 1/8" or 1/4" NPT female port*

All fittings are ENP (Electroless Nickel-Plated)

#10-32 Male to Barb

(5/pack)




Barb (ID)	Order No.	"A"	"R"
1/16"	CT0-2	0.312"	0.468"
3/32"	CT0-3	0.312"	0.493"
1/8"	CT0-4	0.312"	0.562"

Gasket included, not installed

#10-32 Male to Barb Universal

(5/pack)




Barb (ID)	Order No.	"A"	"R"
1/16"	UT0-2	0.344"	0.504"
3/32"	UT0-3	0.344"	0.556"
1/8"	UT0-4	0.344"	0.576"

Buna-N o-ring included

#10-32 Female to Barb


(5/pack)



Barb (ID)	Order No.	"A"	"R"
1/16"	CF0-2	0.468"	0.453"
3/32"	CF0-3	0.468"	0.493"
1/8"	CF0-4	0.468"	0.525"

Universal #10-32


(5/pack)



Order No.	"A"	"R"
UT0-F	0.344"	0.500"

#10-32 Male to Barb Swivel

(5/pack)




Barb (ID)	Order No.	"A"	"R"
1/16"	ST0-2	0.578"	0.531"
3/32"	ST0-3	0.578"	0.580"
1/8"	ST0-4	0.578"	0.611"

Gasket included, not installed

1/8" NPT Male Swivel


(5/pack)



Barb (ID)	Order No.	"A"	"R"
1/16"	SP0-2	0.843"	0.612"
1/16"	SP0-3	0.843"	0.653"
1/8"	SP0-4	0.843"	0.684"

1/8" Barb to Barb Swivel

(5/pack)



Barb (ID)	Order No.	"A"	"R"
1/8"	S40-4	0.875"	0.656"




#10-32 BRANCH TEES

All fittings are ENP (Electroless Nickel-Plated)

#10-32 Male to Barb

(5/pack)

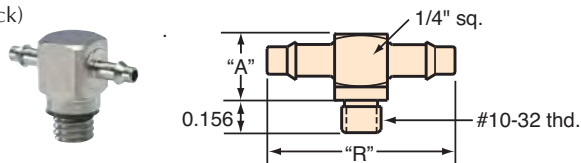


Barb (ID)	Barb (ID)	Order No.	"A"	"R"
1/16"	1/16"	TT0-202	0.312"	0.670"
3/32"	3/32"	TT0-303	0.312"	0.738"
1/8"	1/16"	TT0-402	0.312"	0.748"
1/8"	1/8"	TT0-404	0.312"	0.826"

Buna-N gasket included, not installed

#10-32 Male Universal

(5/pack)




Barb (ID)	Barb (ID)	Order No.	"A"	"R"
1/16"	1/16"	UT0-2002	0.344"	0.718"
1/16"	3/32"	UT0-3002	0.344"	0.759"
1/16"	3/32"	UT0-3003	0.344"	0.800"
1/8"	1/16"	UT0-4002	0.344"	0.790"
1/8"	3/32"	UT0-4003	0.344"	0.832"
1/8"	1/8"	UT0-4004	0.344"	0.863"

Buna-N o-ring included

Universal #10-32


(5/pack)



Order No.	"A"	"R"
UT0-F0F	0.351"	0.500"

#10-32 Male Swivel

(5/pack)

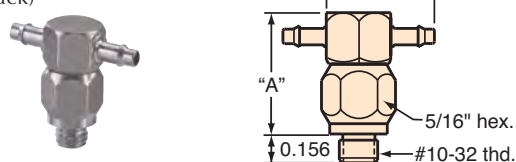


Barb (ID)	Barb (ID)	Order No.	"A"	"R"
1/16"	1/16"	ST0-2002	0.578"	0.718"
3/32"	3/32"	ST0-3003	0.578"	0.801"
1/8"	1/8"	ST0-4004	0.578"	0.863"

Gasket included, not installed

1/8" NPT Male Swivel


(5/pack)

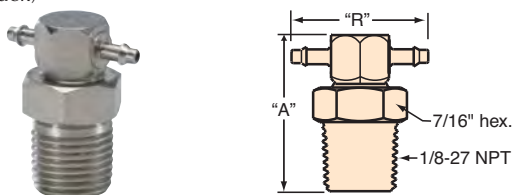

Barb (ID)	Barb (ID)	Order No.	"A"	"R"
1/16"	1/16"	SP0-2002	0.843"	0.718"
3/32"	3/32"	SP0-3003	0.843"	0.801"
1/8"	1/8"	SP0-4004	0.843"	0.863"

Barb to Barb


(5/pack)

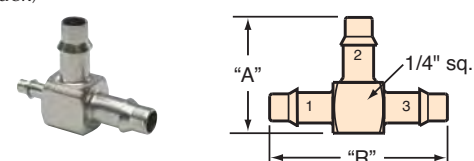

Barb 1 (ID)	Barb 2 (ID)	Barb 3 (ID)	Order No.	"A"	"R"
1/16"	1/16"	1/16"	T22-2	0.671"	0.460"
1/16"	1/16"	1/8"	T42-2	0.734"	0.460"
1/16"	3/32"	1/16"	T22-3	0.656"	0.494"
1/16"	1/8"	1/16"	T22-4	0.656"	0.538"
1/16"	1/8"	1/8"	T42-4	0.734"	0.538"
3/32"	1/16"	3/32"	T33-2	0.712"	0.460"
3/32"	3/32"	3/32"	T33-3	0.712"	0.494"
3/32"	1/8"	3/32"	T33-4	0.712"	0.538"
1/8"	1/16"	1/8"	T44-2	0.812"	0.460"
1/8"	3/32"	1/8"	T44-3	0.812"	0.494"
1/8"	1/8"	1/8"	T44-4	0.812"	0.538"

Barb to Barb Swivel

(5/pack)

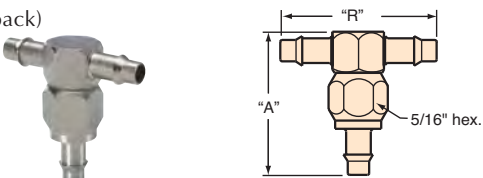


Barb (ID)	Order No.	"A"	"R"
1/8"	S40-4004	0.871"	0.611"

All fittings are ENP (Electroless Nickel-Plated)

#10-32 Male to Barb

(5/pack)




Barb 1 (ID)	Barb 2 (ID)	Order No.	"A"	"R"
1/16"	1/16"	TT2-2	0.515"	0.460"
1/16"	1/8"	TT2-4	0.500"	0.525"
3/32"	3/32"	TT3-3	0.543"	0.493"
1/8"	1/16"	TT4-2	0.593"	0.460"
1/8"	1/8"	TT4-4	0.593"	0.538"

Buna-N gasket included, not installed

#10-32 Male to Barb Swivel

(5/pack)




Barb 1 (ID)	Barb 2 (ID)	Order No.	"A"	"R"
1/16"	1/16"	ST2-2	0.793"	0.531"
3/32"	3/32"	ST3-3	0.821"	0.580"
1/8"	1/8"	ST4-4	0.902"	0.611"

Gasket included, not installed

Universal #10-32 to Barb

(5/pack)




Barb (ID)	Order No.	"A"	"R"
1/16"	UTF-2	0.562"	0.504"
3/32"	UTF-3	0.562"	0.556"
1/8"	UTF-4	0.562"	0.576"

Buna-N o-ring included

Universal #10-32


(5/pack)



Order No.	"A"	"R"
UTF-F	0.562"	0.500"

1/8" NPT Male to Barb


(5/pack)



Barbs (ID)	Order No.	"A"	"R"
1/16"	SP2-2	1.031"	0.625"
3/32"	SP3-3	0.656"	1.062"
1/8"	SP4-4	1.156"	0.718"

Barb to Barb Swivel

(5/pack)



Barb 1 (ID)	Barb 2 (ID)	Order No.	"A"	"R"
1/16"	1/16"	S42-2	1.074"	0.531"
1/8"	1/8"	S44-4	1.183"	0.611"




MINIMATIC® CROSS & COMPRESSION FITTINGS

All fittings are ENP (Electroless Nickel-Plated) unless otherwise noted

#10-32 Male to Barb

(5/pack)

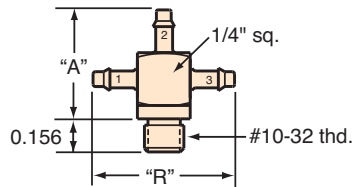


Barb 1 (ID)	Barb 2 (ID)	Barb 3 (ID)	Order No.	"A"	"R"
1/16"	1/16"	1/16"	XT2-202	0.515"	0.670"
1/16"	1/8"	1/16"	XT4-202	0.593"	0.670"
3/32"	3/32"	3/32"	XT3-303	0.543"	0.736"
1/8"	1/16"	1/16"	XT2-402	0.515"	0.748"
1/8"	1/16"	1/8"	XT2-404	0.515"	0.826"
1/8"	1/8"	1/16"	XT4-402	0.593"	0.748"
1/8"	1/8"	1/8"	XT4-404	0.593"	0.826"

Buna-N gasket included, not installed

Universal #10-32 to Barb

(5/pack)




Barb	Barb	Order No.	"A"	"R"
1/16"	1/16"	UTF-2002	0.562"	0.718"
3/32"	3/32"	UTF-3003	0.562"	0.800"
1/8"	1/16"	UTF-4002	0.562"	0.790"
1/8"	1/8"	UTF-4004	0.562"	0.863"

Buna-N o-ring included

Universal #10-32


(5/pack)



Order No.	"A"	"R"
UTF-FOF	0.562"	0.625"

Barb to Barb


(5/pack)



Barb 1	Barb 2	Barb 3	Barb 4	Order No.	"A"	"R"
1/16"	1/16"	1/16"	1/16"	X22-202	0.656"	0.670"
1/16"	1/16"	1/16"	3/32"	X32-202	0.684"	0.670"
1/16"	1/16"	1/16"	1/8"	X42-202	0.734"	0.670"
1/16"	1/8"	1/16"	1/8"	X44-202	0.812"	0.670"
1/16"	1/8"	1/8"	1/8"	X44-402	0.812"	0.748"
3/32"	1/16"	3/32"	1/16"	X33-202	0.712"	0.748"
3/32"	3/32"	3/32"	3/32"	X33-303	0.712"	0.736"
3/32"	1/8"	3/32"	1/8"	X44-303	0.812"	0.736"
3/32"	3/32"	3/32"	1/8"	X43-303	0.762"	0.736"
1/8"	1/16"	1/16"	1/8"	X42-402	0.734"	0.748"
1/8"	1/8"	1/8"	1/8"	X44-404	0.812"	0.826"

Compression Fittings

Brass #10-32 to Tube Compression Fittings with Captivated O-Rings




Tube (OD)	Order No.	"A"	"D" Dia.
1/8"	11923	0.694"	0.090"
1/16"	15160	0.694"	0.046"

Options: (-ENP)

Replacement Ferrule and nut #15155 (11923 only)

BrassNPT to 1/8" O.D. Tube Compression Fittings



NPT	Order No.	"B"	Hex
1/8"	3810-1	1.035"	7/16"
1/16"	3810-2	0.914"	3/8"

Options: (-ENP)


Replacement Ferrule and nut #15155

#10-32 NIPPLES & COUPLINGS



Male #10-32 Nipple

(5/pack)

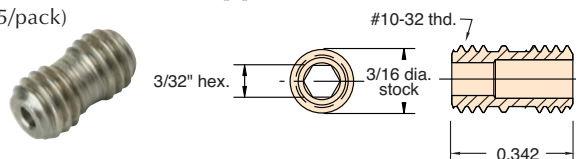

Order No.

15453


Material: Stainless steel

Seals: Sealant necessary

Use: Excellent for a surface to surface connection of female #10-32 products

#10-32 Male Nipple

(5/pack)

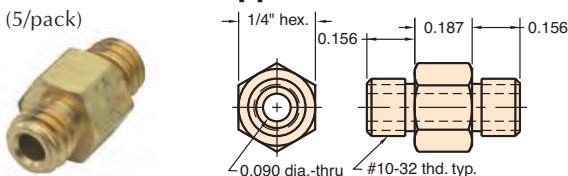

Order No.

11999

Thread: #10-32 both ends

Options: (-ENP)


Gaskets: Buna-N 2 furnished

Use: For coupling cylinders directly to valves, and many other coupling arrangements



#10-32 Female Hex Coupling

(5/pack)

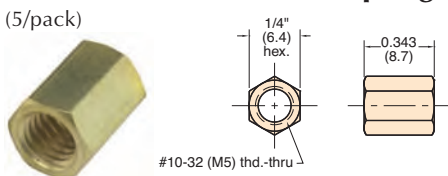

Order No.

15004

Thread: #10-32 tapped (M5)


Options: (-M5), (-ENP)

Use: For coupling two #10-32 (M5) male fittings



#10-32 Extension Fitting

(5/pack)

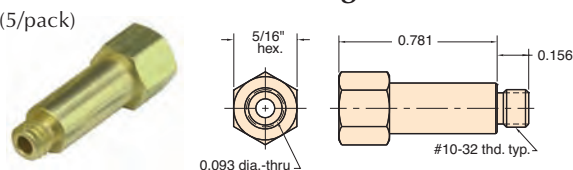

Order No.

15010

Gasket: Buna-N furnished


Options: (-ENP)

Use: To provide extension for convenience in assembling components



#10-32 Swivel Fitting

(5/pack)

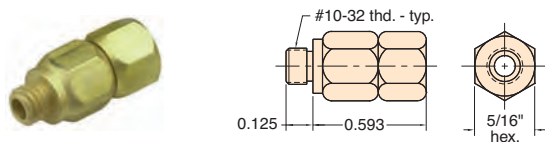

Order No.

15040

Thread: #10-32

Options: (-ENP)

Seals: Buna-N o-ring (gasket furnished package only)


Use: Allows connection to rotate for tightening in confined spaces

Note: Used for positioning not for rotary connector



1/8" NPT to #10-32 Swivel Adapter

(5/pack)

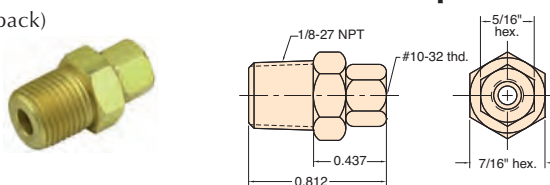

Order No.

15060

Thread: 1/8-27 NPT male and #10-32 tapped **Options:** (-ENP)

Seals: Buna-N o-ring


Use: Allows connection to rotate for tightening in confined spaces.

Note: Used for positioning not for rotary connector



Female 1/8" NPT to #10-32 Swivel Adapter

(5/pack)

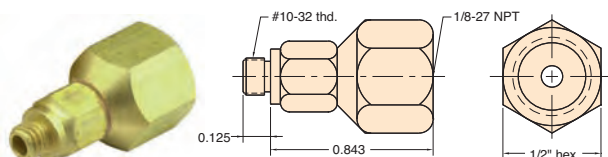

Order No.

15050

Thread: #10-32 and tapped for 1/8-27 NPT **Options:** (-ENP)

Seals: Buna-N o-ring (gasket furnished package only)

Use: Allow connection to rotate for tightening in confined spaces

Note: Used for positioning not for rotary connector






MINIMATIC® L T X FITTINGS

All fittings are Brass unless otherwise noted

#3-56 Couplings

(5/pack)



Porting	Order No.
In-Line	11749-1
"T"	11749-2
"X"	11749-3

Thread: M2.5 - 0.45 (#3-56 US equiv.)


Options: (-ENP)

Use: Threads into Clippard subminiature cylinder; fits 1/16" I.D. hose



#10-32 "X" Coupling

(5/pack)




Order No.
15002-5

Options: (-ENP)



#10-32 to #10-32 Fittings

(5/pack)




Porting	Order No.	Hex.
"L"	15002-2	7/16"
"T"	15002-3	7/16"
"X"	15002-4	7/16"

Options: (-ENP)



Adjustable #10-32 "L" Fitting

(5/pack)

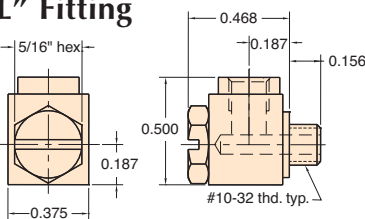

Order No.
15002-1

Stud: Stainless steel hex head with screwdriver slot (12292)


Seals: Buna-N o-ring furnished

Options: (-ENP)



Adjustable #10-32 "T" Fitting

(5/pack)

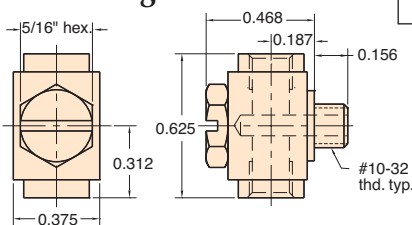

Order No.
15002-6

Stud: Stainless steel hex head with screwdriver slot (12292)


Seals: Buna-N o-ring furnished

Options: (-ENP)



Miniature #10-32 Manifold Stud

(5/pack)

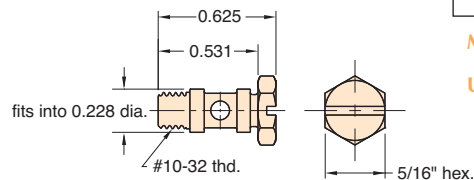


Order No.
12292

Material: Stainless steel **Seals:** Buna-N o-ring and gasket furnished

Use: This hollow, cross-drilled stud is useful for connecting specially-made manifolds to multiple ports of valves or cylinders, eliminating need for external fittings with hose

1/8" NPT to #10-32 Adapter Fittings

(5/pack)



Porting	Order No.	Hex.
"L"	15090-1	7/16"
"T"	15090-2	7/16"
"X"	15090-3	7/16"

Options: (-ENP)




BRASS PIPE REDUCER BUSHINGS



All fittings are Brass unless otherwise noted

#10-32 Thread to Male NPT

(5/pack)




External Thd.	Order No.	"A"	"H" Hex.
1/8" NPT	15036	0.250"	5/32"

Will adapt standard pipe to fittings and Clippard miniature components

To be used with a thread sealant in applications where low profile (no hex) or flush mount is desired.

#10-32 Thread to Male NPT

(5/pack)




External Thd.	Order No.	"A"	"H" Hex.
1/16" NPT	1CIF	0.468"	5/16"
1/8" NPT	2CPF	0.531"	7/16"
1/4" NPT	4COF	0.562"	9/16"
3/8" NPT	6CWF	0.687"	1 1/16"
1/2" NPT	8CZF	0.812"	1 3/16"

Will adapt standard pipe to fittings and Clippard miniature components.
(-ENP) optional.

1/16" NPT Thread to Male NPT

(5/pack)




External Thd.	Order No.	"A"	"H" Hex.
1/8" NPT	2CPK	0.531"	7/16"
1/4" NPT	4COK	0.562"	9/16"
3/8" NPT	6CWK	0.687"	1 1/16"
1/2" NPT	8CZK	0.812"	1 3/16"

Will adapt standard pipe to fittings and Clippard miniature components.
(-ENP) optional.

1/8" NPT Thread to Male NPT

(5/pack)




External Thd.	Order No.	"A"	"H" Hex.
1/4" NPT	4CON	0.562"	9/16"
3/8" NPT	6CWN	0.687"	1 1/16"
1/2" NPT	8CZN	0.812"	1 3/16"

Will adapt standard pipe to fittings and Clippard miniature components.
(-ENP) optional.

1/4" NPT Thread to Male NPT

(5/pack)




External Thd.	Order No.	"A"	"H" Hex.
3/8" NPT	6CWY	0.687"	1 1/16"
1/2" NPT	8CZY	0.812"	1 3/16"

Will adapt standard pipe to fittings and Clippard miniature components.
(-ENP) optional.

3/8" NPT Thread to Male NPT

(5/pack)



External Thd.	Order No.	"A"	"H" Hex.
1/2" NPT	8CZD	0.812"	1 3/16"

Will adapt standard pipe to fittings and Clippard miniature components.
(-ENP) optional.

Tips On Using Minimatic® Fittings

Hose or Tubing Size

The use of different sizes of hose or tubing in your circuits deserves some care and consideration. In general, follow this guide for the size of hose or tubing you use.

For air logic circuits, we recommend:
1/16" I.D. for pilots
1/8" I.D. for supplies and outputs



PLUGS & BULKHEAD FITTINGS

#10-32 Screw Plugs

Gasket: Buna-N furnished package only


Use: For plugging unused ports in manifolds, air lines and other devices

Use: For plugging unused ports in manifold, air lines and other devices that require a flush surface plug; use 3/32 Allen hex wrench to install

Note: Thread sealant recommended

Headless Plug

(5/pack)




Order No.	Description
<u>11755</u>	Brass Plug

Options: (-ENP)



Headless Plug with Captivated O-Ring


(5/pack)



Order No.	Description
<u>11782-7</u>	ENP Plug

Headless Plug

(5/pack)




Order No.	Description
<u>0035-2</u>	Stainless Steel Headless Plug

Thread sealant required

Bulkhead Fittings

(5/pack)



Internal Thd.	Mtg. Thread	Order No.	"A"	"B"	"H" Hex.
#10-32	#15/32-32	<u>15027</u>	0.500"	0.125"	9/16"
1/8" NPT	1/8-27 NPT	<u>15029-1</u>	1.000"	0.250"	7/8"
1/4" NPT	3/4-20	<u>15029-2</u>	1.000"	0.250"	7/8"

Options: (-ENP)


Locking Nut: Two steel lockwashers



Clippard's reputation of building jigs, fixtures and machines as well as modifying existing machines to improve productivity is carried on in its well equipped machine shop. New product prototypes are crafted by experienced engineers and machinists.



Gaskets



Buna-N gaskets are designed for use with #10-32 threads; included with packaged Clippard fittings. -40 to 250°F.

Viton gaskets are designed for use with #10-32 threads in high temperature applications. -20 to 450°F.

Material	Order No.	"A" Dia.	"B"	"D" Dia.
Buna-N	11761-2	0.240"	0.022"	0.150"
Viton	11761-8	0.240"	0.022"	0.150"
Nylon	11761-4	0.307"	0.031"	0.192"
EPDM	11761-7	0.240"	0.002"	0.150"

Designed for use with #10-32 threads

Nylon gaskets are designed for use with #10-32 threads in applications that require nylon for chemical compatibility. 40 to 200°F.

EPDM gaskets are designed for use with #10-32 threads in applications that require EPDM for low temperature or chemical compatibility; do not use with petroleum-based lubricants. -60 to 300°F.

Gasket Tips

Gaskets are recommended for use with Clippard fittings. They provide snug, dependable seals without extra effort or materials. The most popular gasket for static sealing of #10-32 threads is the 11761-2 Buna-N Gasket. This gasket is included with packaged fittings and comes installed on a variety of Minimatic® slip-on fittings. Overtightening fittings with gaskets may have a tendency to extrude the gasket. While this may be a concern, the actual sealing is being accomplished by a small piece of the gasket at the base of the threads.

Sealants There are a number of brands of anaerobic sealants that may be used with Clippard fittings. Anaerobic sealants are applied wet and harden when no longer exposed to air. their proper use results in a very effective, low cost seal. There are several alternate sealing methods:

1. sealant alone
2. gasket alone
3. gasket and sealant combination


The first two methods will provide adequate sealing for normal air pressures. When extra resistance to vibration is necessary or a permanent orientation of the fitting is required, use of the combination of both gasket and sealant is recommended.

Tips On Using Barb Fittings

Hose or Tubing Size. The use of different sizes of hose or tubing in your circuits deserves some care and consideration. In general, follow the manufacturer's guide for the size of hose or tubing you use. For air logic circuits, we recommend 1/16" ID for pilots and 1/8" ID for supplies and outputs.

Swivel Fittings. Minimatic® swivel connector fittings are very efficient in applications where joints need to be disconnected and reconnected frequently. Made with a threaded connection on one end and a swivel connection on the other, these fittings provide a true cost savings on pneumatic circuit designs. They are valuable also where short lengths of hose are being connected. Note: These are not rotating joints. They are for assembly benefits . . . not as a constant rotation connection.

Tightening #10-32 Fittings. TIGHTEN WITH CARE. Often a "finger tight" connection between Clippard fittings with anaerobic sealant is all that is required. When using a gasket, most Clippard #10-32 threaded fittings require no more than 9 inch-pounds of torque to seal. We recommend that this force not be exceeded. Use wrench [#11770](#) with a 1/4" and 5/16" open-end.

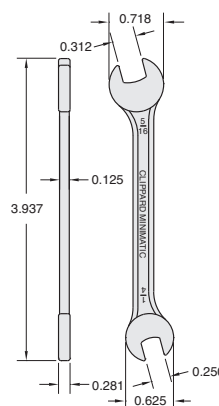




MUFFLERS & MANIFOLDS

All fittings are Brass unless otherwise noted


NEW! Brass Mufflers

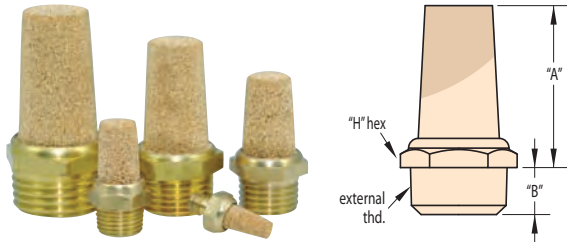

External Thd.	Order No.	"A"	"B"	"H" Hex.
#10-32	11130-N	0.195"	0.560"	8 mm
1/8" NPT	11130-P	0.259"	0.259"	12 mm
1/4" NPT	11130-Q	0.300"	0.300"	14 mm
3/8" NPT	11130-W	1.129"	0.330"	17 mm
1/2" NPT	11130-Z	1.331"	0.386"	21 mm

Sintered bronze muffler (40 micron), Buna-N gasket furnished on #11130-N only

1/8" NPT Muffler

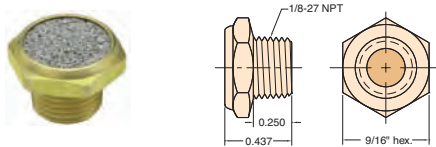

Order No.	Description
15080	1/8" NPT Muffler

Material: Solid brass body; sintered stainless steel insert (100 micron)


Thread: 1/8" NPT

Options: (-ENP)

Use: To muffle exhaust for quiet system operation



#10-32 ENP Muffler

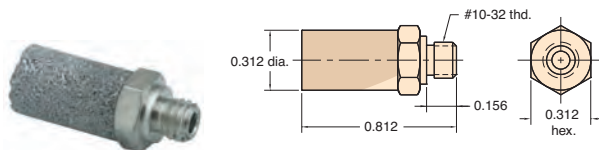


Order No.	Description
15070	#10-32 Muffler

Material: Electroless nickel plated brass body sintered stainless steel muffler (60 micron)

Gasket: Buna-N furnished

Use: To muffle exhaust for quiet system operation

12-Port Manifold

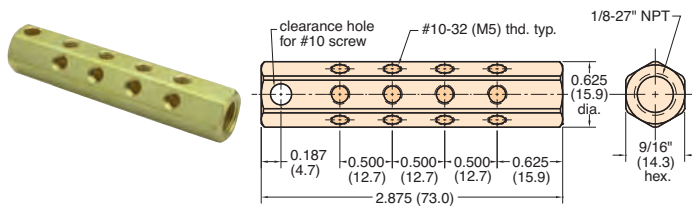

Order No.
MAN-12

Material: Brass

Options: (-ENP)


Thread: Tapped ports: 1/8" standard pipe tapped inlet

Mounting: 13/64" diameter mounting hole

Use: May be mounted on jigs, fixtures or machinery to provide up to 12 convenient #10-32 outlets from one standard 1/8" pipe connection; may be used with any Clippard #10-32 fittings, quick connects and many other devices; unused ports can be plugged with screw plug 11755



6-Port Rotary Manifold

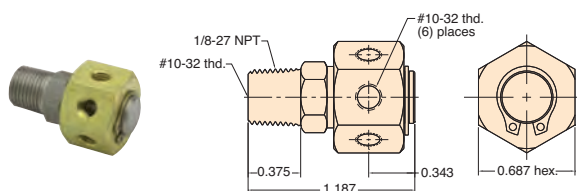

Order No.
MRM-6

Material: Brass and stainless steel

Thread: 1/8" NPT for inlet is also tapped #10-32; outlet consists of 6 ports tapped #10-32

Seals: Buna-N o-ring furnished


Working Range: 250 psig max.

Air Flow: 5.9 scfm @ 50 psig

Use: May be used either as a rotary joint or as a stationary manifold; ideal for distributing air or liquid from center column onto a rotary index table; unused ports may be plugged with screw plug 11755 and gasket

Low RPM applications

Miniature Terminal Blocks

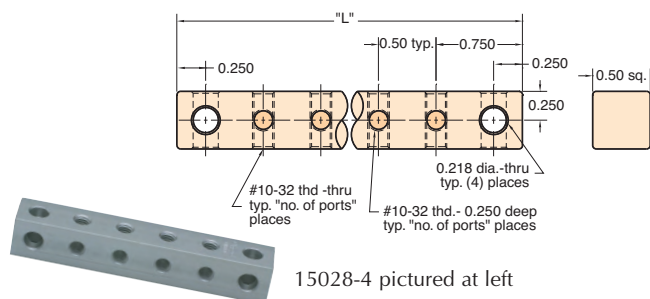

Order No.	# of Ports	"A"	"L"
15028-4	4	2.500"	3.000"
15028-6	6	3.500"	4.000"
15028-8	8	4.500"	5.000"
15028-10	10	5.500"	6.000"


Material: Anodized aluminum

Thread: #10-32 tapped ports

Mounting: With two 7/32: diameter mounting holes

Use: To help organize connections in circuit boxes, control panels and machine piping; cross drilled mounting holes permit mounting of "T" in any direction; use screw plug 11755 to plug unused ports


#10-32 Block Manifolds

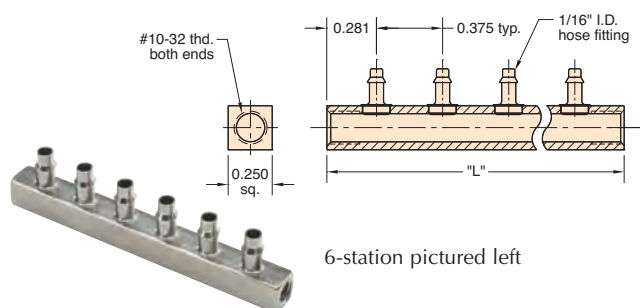

Order No.	# of Stations	Hose Barbs	"L"
BTT2-04	4	1/16" I.D.	1.687"
BTT2-06	6	1/16" I.D.	2.437"
BTT2-08	8	1/16" I.D.	3.187"
BTT2-10	10	1/16" I.D.	3.937"
BTT2-12	12	1/16" I.D.	4.687"
BTT4-04	4	1/8" I.D.	1.687"
BTT4-06	6	1/8" I.D.	2.437"
BTT4-08	8	1/8" I.D.	3.187"
BTT4-10	10	1/8" I.D.	3.937"
BTT4-12	12	1/8" I.D.	4.687"

One end may be used as the air supply to the manifold and the other end plugged.

#10-32 Block Manifolds with #6 Screws

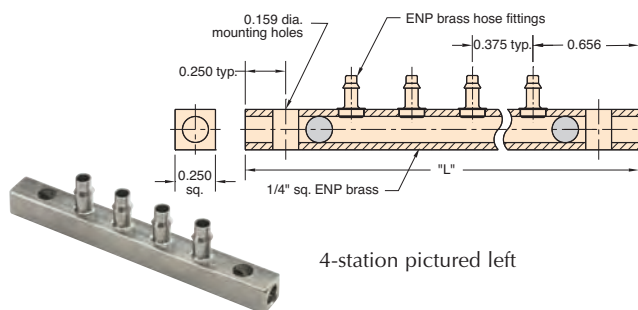

Order No.	# of Stations	Hose Barbs	"L"
BHH2-04	4	1/16" I.D.	2.437"
BHH2-06	6	1/16" I.D.	3.187"
BHH2-08	8	1/16" I.D.	3.937"
BHH2-10	10	1/16" I.D.	4.687"
BHH2-12	12	1/16" I.D.	5.437"
BHH4-04	4	1/8" I.D.	2.437"
BHH4-06	6	1/8" I.D.	3.187"
BHH4-08	8	1/8" I.D.	3.937"
BHH4-10	10	1/8" I.D.	4.687"
BHH4-12	12	1/8" I.D.	5.437"

One of the stations must be used as the air supply to the manifold.

CUSTOMer solutions

If you need a product that fits your application perfectly, Clippard has the capability to design or modify one of its products to suit your exact needs. We understand that a standard catalog product may be close but not be exactly what you need. **Let us know YOUR Need, and we will help to find YOUR Solution!**



Bleed Valves

This miniature device is a vent or bleed valve that uses a tire stem valve in a small panel-mounted body with integral hose barb.



Standard fittings don't always fit!

Clippard manufactures custom fittings to meet your exact requirements.





MANIFOLDS

In-Line Manifolds

Clippard's aluminum pipe thread manifolds are an economical and efficient choice for grouping pneumatic valves and other components in applications where space is limited. In addition, manifolds help to reduce potential leak points and allow for faster installation, all with one common air supply and less piping.

A unique feature of this series of manifolds is a bottom T-slot mounting system which allows for secure mounting using only two carriage bolts on any center distance along the length of the manifold. Hardware Kit ordered separately.




Medium: Air or Liquid

Material: Clear Anodized Aluminum

Outlet Ports (Top Ports): 1/8" NPT or 1/4" NPT

Inlet Ports (End Ports): 1/4" NPT or 3/8" NPT

Mounting: Top-to-bottom and front-to-back mounting holes as well as bottom T-slot mounting system

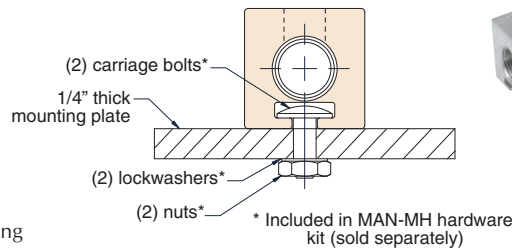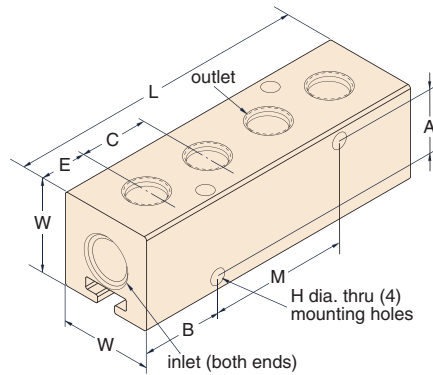

Part No.	Stations **	Width "W"	End Inlets	Top Outlets	Center "C"***	End "E"	Length "L"	Mtg. "M"	"A"	"B"	Hole* "H"
MAN-ASF1-04	4						3.250"	1.500"			
MAN-ASF1-06	6	1"	1/4" NPT	1/8" NPT	0.750"	0.500"	4.750"	3.000"	0.700"	0.875"	0.172"
MAN-ASF1-08	8	Sq.					6.250"	4.500"			(#8
MAN-ASF1-10	10						7.750"	6.000"			screw)
MAN-ALF1-04	4						3.250"	1.500"			
MAN-ALF1-06	6	1 1/4"	3/8" NPT	1/8" NPT	0.750"	0.500"	4.750"	3.000"	0.875"	0.875"	0.201"
MAN-ALF1-08	8	Sq.					6.250"	4.500"			(#10
MAN-ALF1-10	10						7.750"	6.000"			screw)
MAN-ALF2-04	4						4.125"	1.750"			
MAN-ALF2-06	6	1 1/4"	3/8" NPT	1/8" NPT	0.875"	0.750"	5.875"	3.500"	0.875"	1.187"	0.201"
MAN-ALF2-08	8	Sq.					7.625"	5.250"			(#10
MAN-ALF2-10	10						9.375"	7.000"			screw)
MAN-ALY2-04	4						3.875"	1.750"			
MAN-ALY2-06	6	1 1/4"	3/8" NPT	1/4" NPT	0.875"	0.625"	5.625"	3.500"	0.875"	1.062"	0.201"
MAN-ALY2-08	8	Sq.					7.375"	5.250"			(#10
MAN-ALY2-10	10						9.125"	7.000"			screw)
MAN-ALY6-04	4						5.875"	2.750"			
MAN-ALY6-06	6	1 1/4"	3/8" NPT	1/4" NPT	1.375"	0.875"	8.625"	5.500"	0.875"	1.562"	0.201"
MAN-ALY6-08	8	Sq.					11.375"	6.250"			(#10
MAN-ALY6-10	10						14.125"	11.000"			screw)

* 0.172" can be tapped by the user for #10-32 thread; 0.201" may be tapped by user for 1/4"-20 thread for mounting.

** Variations available—consult factory.

MINIMATIC® J-SERIES QUICK CONNECT



The Minimatic J-Series quick connect consists of two component parts that are joined to form the complete connector. The valve body contains a 2-way spring-loaded poppet valve that is generally connected to the main air supply. When the poppet is not depressed, the air supply is shut-off by this valve. The Cap contains a valve depressor that when assembled to the valve body, depresses the poppet allowing air to flow from the main supply to circuitry or equipment downstream. Valve body & cap assemblies contain both components.

M J Q C - [] [] [] []

Cap

B4 - 1/8" hose barb
FT - #10-32 female thd.
PF - Panel mount #10-32 female thd.
PB - Panel mount 1/8" hose barb
MP - 1/8" male NPT thd.
MQ - 1/4" male NPT thd.

Valve Body

B4 - 1/8" hose barb
FT - #10-32 female thd.
MT - #10-32 male thd.
MP - 1/8" male NPT thd.
FP - 1/8" female NPT thd.
MQ - 1/4" male NPT thd.

To order just the cap

M J Q C - C [] []


To order just the valve body

M J Q C - V [] []


Valve Body & Cap Assemblies

*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard [URH1-0804](#) polyurethane hose.


- High flow of 14 scfm @ 100 psig
- Space saving attractive miniature design
- Wide variety of connectors
- Adds convenience to equipment and circuits
- Brass body, electroless nickel plated
- Non-corrosive - Delrin® poppet
- Fills the gap between clumsy, large quick connects and smaller quick connects with less flow
- Buna-N seals, positive shut off
- Positive threaded connection, stays connected
- Medium: Air, Oil, or Water
- Working Pressure: 0 to 150 psig max.

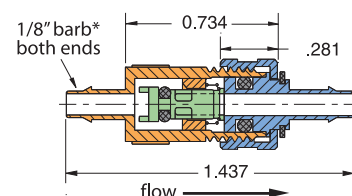

Part No.	Description
MIQC-B4B4	1/8" Barb Outlet, 1/8" Barb Inlet (MJQC-VB4/MJQC-CB4 Combo)

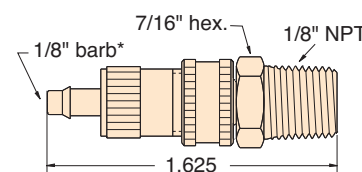


Part No.	Description
MIQC-MPB4	1/8" Barb Outlet, 1/8" NPT Inlet (MJQC-VB4/MJQC-CMP Combo)

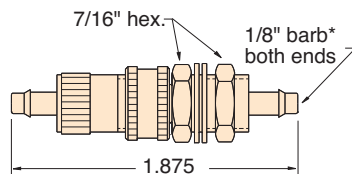


Part No.	Description
MIQC-PBB4	1/8" Barb Outlet, 1/8" Barb Inlet with Thread (MJQC-VB4/MJQC-CPB Combo)

(supplied with mounting nut and two washers)

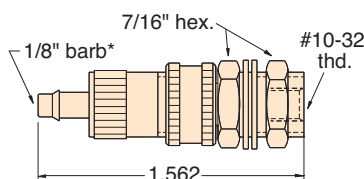

Part No.	Description
MIQC-PFB4	1/8" Barb Outlet, #10-32 Inlet (MJQC-VB4/MJQC-CPF Combo)

(supplied with mounting nut and two washers)




Part No.	Description
MIQC-B4MP	1/8" NPT Outlet, 1/8" Barb Inlet (MJQC-VMP/MJQC-CB4 Combo)




MINIMATIC® J-SERIES QUICK CONNECT FITTINGS

Caps with Open Flow Path


Minimatic J-Series quick connect fittings are ideal for use in jigs, fixtures, feeding devices, logic control circuitry and automatic or semi-automatic machinery. Assembly is simple, and the tightening of the knurled cap assures a positive, leakproof, high pressure connection that will stay connected.




Part No. MIQC-CB4 **Description**
1/8" Barb




Part No. MIQC-CFT **Description**
#10-32

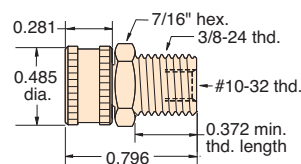


Part No. MIQC-CPF **Description**
3/8" Thread

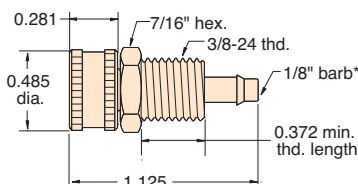

Part No. MIQC-CPB **Description**
1/8" Barb
(supplied with mounting nut and two washers)




Part No. MIQC-CMP **Description**
1/8" NPT




Part No. MIQC-CMQ **Description**
1/4" NPT

Valve Bodies with Shut-Off Valve


Minimatic J-Series quick connect fittings are very compact yet provide a high flow of 14 scfm @ 100 psig. The electroless nickel plated brass body is available with #10-32 threads (M or F), 1/8" NPT threads (M or F), 1/4" NPT threads (M) or a 1/8" hose single barb configuration that is ideal for use with Clippard URH1-0804 polyurethane hose.

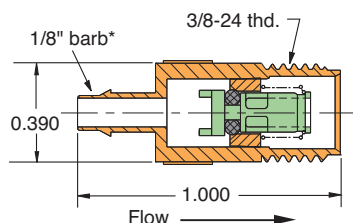


Part No. MIQC-VB4 **Description**
1/8" Barb, 3/8-24 Thd.

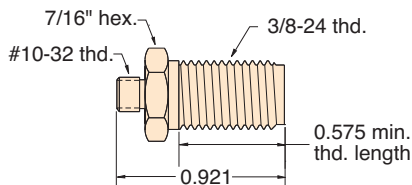


Part No. MIQC-VMT **Description**
#10-32 Male, 3/8-24 Thd.
(supplied with mounting nut and two washers)

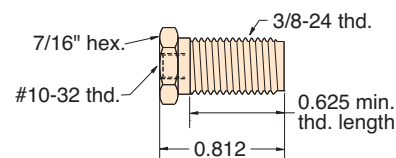


Part No. MIQC-VFT **Description**
#10-32 Female, 3/8-24 Thd.
(supplied with mounting nut and two washers)

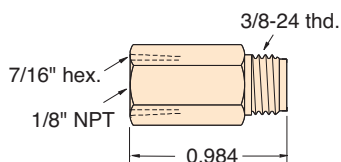

Part No. MIQC-VFP **Description**
1/8" NPT Female, 3/8-24 Thd.

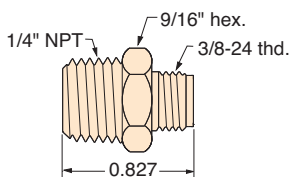

Part No. MIQC-VMQ **Description**
1/4" NPT Male, 3/8-24 Thd.

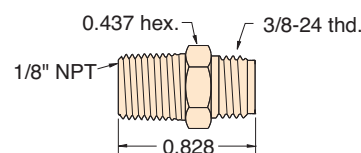

Part No. MIQC-VMP **Description**
1/8" NPT Male, 3/8-24 Thd.


*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard URH1-0804 polyurethane hose.

Push-Quick Fittings with MJQC Quick-Connect Port




These 1/4" fittings combine the quick, easy Push-Quick functionality with the flexibility and security of the Quick-Connect series with no circuit interruption. MJQC Quick-Connect Caps (ordered separately on previous page) attach to the threaded port allowing for a variety of uses.

Part No.	Description
PQ-RT08QC	Run Tee with 3/8-24 Thread
PQ-BT08QC	Branch Tee with 3/8-24 Thread

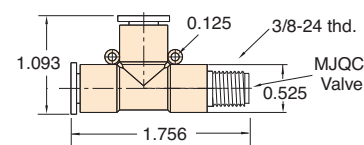


PQ-RT08QC



PQ-BT08QC

- Serves as an easy connection point for temporary functions/circuitry
- Quickly test for air flow
- Easy connection to valves, cylinders, hose, etc.
- Check air pressure via a gauge
- Use as a dump valve/vent

Quick Connect Assembly

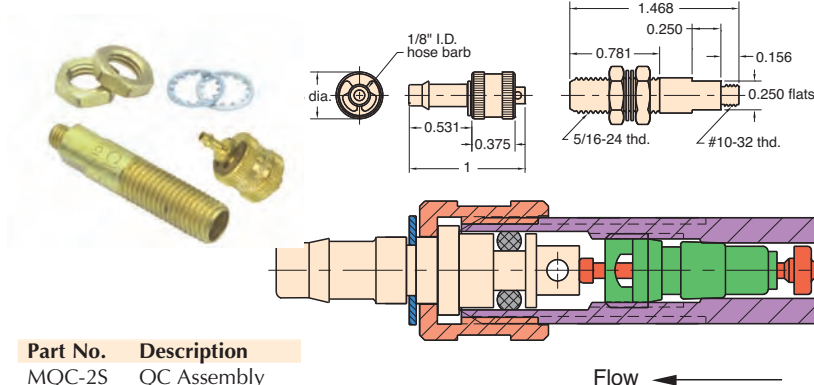

Part No.	Description
MQC-2S	QC Assembly

Type: One way check quick connect assembly of valve body MQC-V2 and hose connector MQC-F

Material: Body- brass, Stem- brass


Seals: Buna-N

Working Pressure: 0 to 300 psig

Air Flow: 3.0 scfm @ 50 psig
5.8 scfm @ 100 psig

Triple Barb: Order MQC-2

Quick Connect Assembly

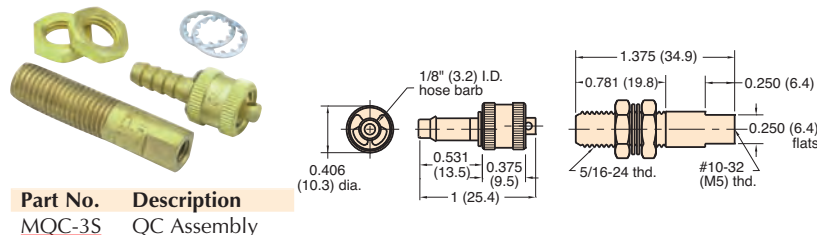

Part No.	Description
MQC-3S	QC Assembly

Type: One way check quick connect assembly of valve body MQC-V3 and hose connector MQC-F

Material: Body- brass, Stem- brass


Seals: Buna-N

Working Pressure: 0 to 300 psig


Air Flow: 3.0 scfm @ 50 psig
5.8 scfm @ 100 psig

Triple Barb: Order MQC-3 or MQC-3-M5 (metric)

Valve Body



Part No.	Description
MQC-V2	Valve Body

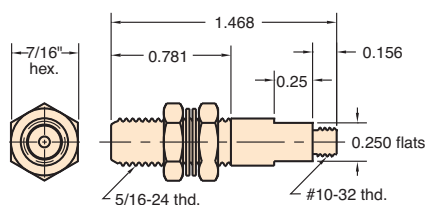

Material: Brass

Thread: #10-32 male

Mounting: In panel or bracket to 1/4" thick with two 7/16" mounting nuts and lockwashers furnished; also screws directly into operative unit or manifold

Seals: Buna-N

Use: For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F2

Options: (-ENP)






MINIMATIC® QUICK CONNECT

All fittings are Brass

Valve Body

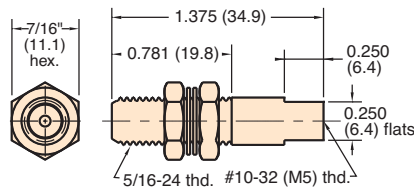

Part No.	Description
----------	-------------

MQC-V3	Valve Body
--------	------------

Thread: Tapped #10-32

Mounting: In panel or bracket to 1/4" thick with two 7/16" mounting nuts and lockwashers furnished; like MQC-V2, but end is tapped #10-32 instead of threaded


Seals: Buna-N

Use: For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F2

Options: (-ENP), (-M5)



Valve Body

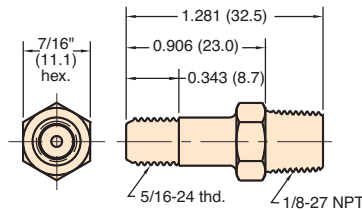

Part No.	Description
----------	-------------

MQC-VP	Valve Body
--------	------------


Thread: 1/8" NPT base; 5/16-24 body

Use: For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F

Seals: Buna-N

Options: (-ENP), (-MR)

1/8" Hose Connector

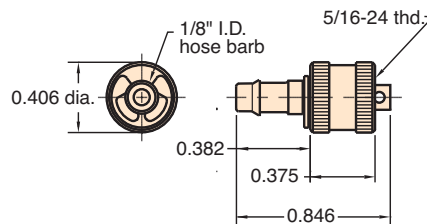

Part No.	Description
----------	-------------

MQC-FS	Hose Connector
--------	----------------

Thread: I.D. of knurled end screws onto male end of valve bodies

For Use With: 1/8" I.D. Vinyl, Buna-N or braided hose


Installation: Simply push hose onto barbed end and secure with hose clamp 5000-1, 5000-2 or 5000-1A.

Seals: Buna-N

Options: (-ENP)

Triple Barb: Order MQC-F

1/16" Hose Connector

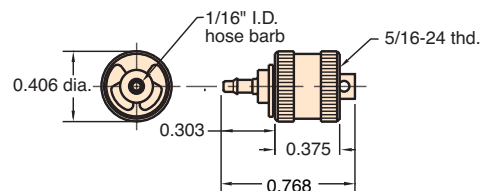

Part No.	Description
----------	-------------

MQC-F2S	Hose Connector
---------	----------------

Thread: I.D. of knurled end screws onto male end of valve bodies

For Use With: Subminiature VYH1-0402-CLT 1/16" ID vinyl hose

Installation: Simply push hose onto barbed end and secure with slip-over hose clamp furnished


Seals: Buna-N

Options: (-ENP)

Triple Barb: Order MQC-F2



#10-32 (M5) Tapped Connector



Part No.	Description
----------	-------------

MQC-FT	#10-32 Connector
--------	------------------

Thread: Outlet is tapped #10-32 or M5 Metric. I.D. of knurled end screws onto male end of valve bodies: MQC-V2, MQC-V3, MQC-VP


Mounting: Outlet mounts with #10-32 (M5) short 9 coupling 11999

Seals: Buna-N

Options: (-ENP), (-M5)



Tip When assembling #10-32 threaded fittings with gaskets, turn the fitting in until the gasket contacts the surface. Then give the fitting less than a 1/4 turn to achieve a good seal.

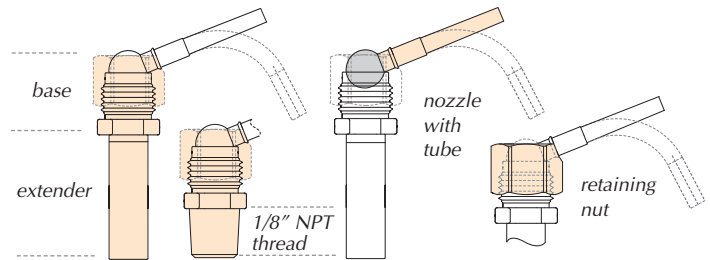

Air Jet Bases & Extenders*

Order No.

<u>AJB-F</u>	Base with #10-32 Female Thread, No Extender
<u>AJB-N</u>	Base with #10-32 Male Thread, No Extender
<u>AJB-P</u>	Base with 1/8" NPT Thread, No Extender
<u>AJB-10</u>	Base with #10-32 Female Thread, 1" Extender
<u>AJB-15</u>	Base with #10-32 Female Thread, 1.5" Extender
<u>AJB-20</u>	Base with #10-32 Female Thread, 2" Extender

* All come complete with retaining nut. Nozzles ordered separately below


Air Jet Nozzles

<u>AJT-B</u>	Ball Nozzle Only
<u>AJT-1S1</u>	Ball Nozzle with 1/32" ID Straight Brass Tube, 1"
<u>AJT-1S2</u>	Ball Nozzle with 1/32" ID Straight Brass Tube, 2"
<u>AJT-1S3</u>	Ball Nozzle with 1/32" ID Straight Brass Tube, 3"
<u>AJT-2S1</u>	Ball Nozzle with 1/16" ID Straight Brass Tube, 1"
<u>AJT-2S2</u>	Ball Nozzle with 1/16" ID Straight Brass Tube, 2"
<u>AJT-2S3</u>	Ball Nozzle with 1/16" ID Straight Brass Tube, 3"
<u>AJT-3S1</u>	Ball Nozzle with 3/32" ID Straight Brass Tube, 1"
<u>AJT-3S2</u>	Ball Nozzle with 3/32" ID Straight Brass Tube, 2"
<u>AJT-3S3</u>	Ball Nozzle with 3/32" ID Straight Brass Tube, 3"
<u>AJT-2F4</u>	Ball Nozzle with Flexible Copper Tube, 4" 1/16" ID only)
<u>AJT-1N</u>	Ball Nozzle with 1/32" ID 90° Tube
<u>AJT-2N</u>	Ball Nozzle with 1/16" ID 90° Tube
<u>AJT-3N</u>	Ball Nozzle with 3/32" ID 90° Tube

Accessories

<u>AJK</u>	Air Jet Kit (see web site for details)
<u>AJS</u>	Mounting Squeeze Block
<u>27801-PKG</u>	Retaining Nut

Air jets are used extensively within the manufacturing environment. They are designed to deliver a concentrated flow of air or liquid to a specific location. They are used in blow-off, cleaning, drying, part ejecting, and cooling applications. Clippard's new line provides a wide variety of nozzles, bases, and mounting hardware to accomplish these functions in a simple, cost-effective way. By selecting the appropriate orifice size, the nozzle can deliver anywhere from a large blast to a small pinpoint stream of air, water, or oil. Nozzles can be easily aimed and locked into position for precise delivery of air or liquid. Nozzle tubes are interchangeable.

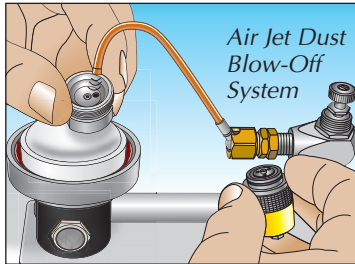

Medium: Air, gases, water, compatible cooling fluids

Materials: Corrosion-resistant brass and stainless steel


Ports: #10-32 male, #10-32 female, 1/8-27 NPT

Pressure Range: Up to 200 psig


Mounting: Mounting squeeze block, direct-mount

Temperature Range: 32 to 180°F (0 to 82°C)


Nozzle Tube I.D.s

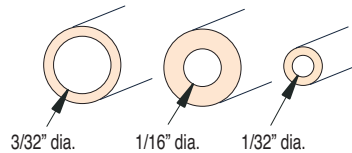

Blank ball nozzles are available to allow customers to install their own special nozzle tubes. Consult Clippard with requirements.

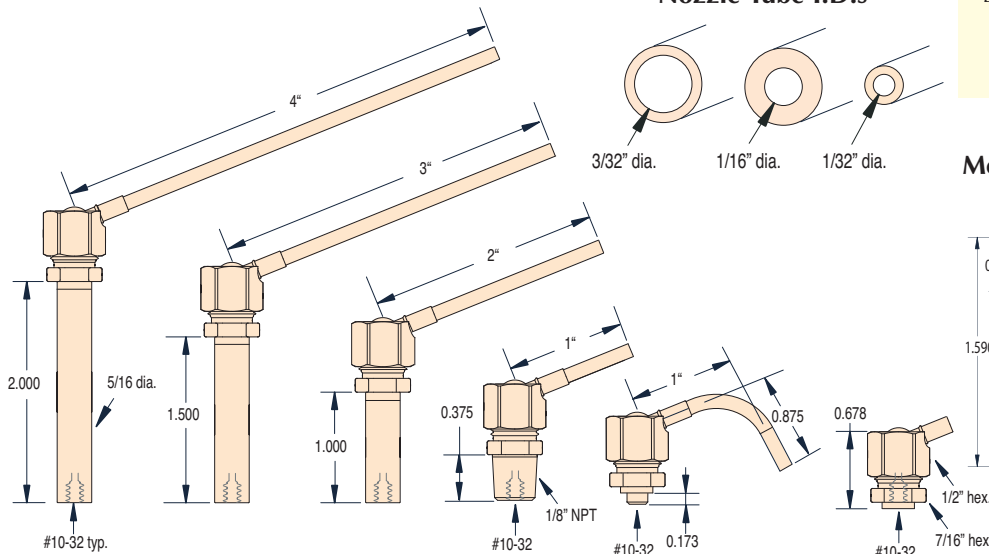

Mounting Squeeze Block

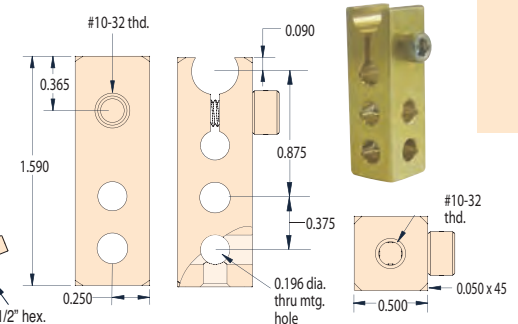



MINIMATIC® FITTINGS KITS



For the ultimate in convenience, have a selection of helpful fittings available for every need. Keeping a supply of fittings on hand can save money and time, allowing projects, prototypes, circuits, and repairs to be finished quickly and avoiding delays.

These Minimatic fittings kits contain a variety of the most commonly used fittings and quick connects. The kit saves time ordering and additional parts or replacements can be ordered at any time. Each kit comes in a sturdy plastic case.



Minimatic Slip-On Fittings Kit



Contains:

- CT0-2 Connector Elbow 1/16" I.D. Hose to #10-32M
- UT0-2 Universal Elbow 1/16" I.D. Hose to #10-32M
- ST0-2 Swivel Elbow 1/16" I.D. Hose to #10-32M
- CT0-4 Connector Elbow 1/8" I.D. Hose to #10-32M
- UT0-4 Universal Elbow 1/8" I.D. Hose to #10-32M
- ST0-4 Swivel Elbow 1/8" I.D. Hose to #10-32M
- TT0-202 Connector 1/16" I.D. Hose Tee with #10-32M
- UT0-2002 Universal 1/16" I.D. Hose Tee with #10-32M
- ST0-2002 Swivel 1/16" I.D. Hose Tee with #10-32M
- TT0-404 Connector 1/8" I.D. Hose Tee with #10-32M
- UT0-4004 Universal 1/8" I.D. Hose Tee with #10-32M
- ST0-4004 Swivel 1/8" I.D. Hose Tee with #10-32M
- Clippard 1/4" & 5/16" Wrench 11770
- 11761-2 Gasket
- Hose Samples

- UT0-FOF Universal Tee #10-32M to #10-32F
- UT0-F Universal Elbow #10-32M to #10-32F
- UTF-F Universal Tee #10-32M to #10-32F
- UTF-FOF Universal Cross #10-32M to #10-32F

• In-Line Connectors

- C44 1/8" I.D. Hose to 1/8" I.D. Hose
- C42 1/8" I.D. Hose to 1/16" I.D. Hose
- C22 1/16" I.D. Hose to 1/16" I.D. Hose
- T22-4 1/8" I.D. Hose Tee to 1/16" I.D. Hose
- T44-2 1/16" I.D. Hose Tee to 1/8" I.D. Hose
- X44-404 1/8" I.D. Hose Cross
- X22-202 1/16" I.D. Hose Cross
- SP0-4 1/8" MNPT to Elbow 1/8" I.D. Hose
- SP0-2 1/8" MNPT to Elbow 1/16" I.D. Hose
- SP0-4004 1/8" MNPT to Tee 1/8" I.D. Hose
- SP0-2002 1/8" MNPT to Tee 1/16" I.D. Hose
- T22-2 1/16" I.D. Hose Tee
- T44-4 1/8" I.D. Hose Tee
- XT4-404 1/8" I.D. Hose Cross with #10-32M
- XT2-202 1/16" I.D. Hose Cross with #10-32M
- CT2 1/16" I.D. Hose to #10-32M
- CT4 1/8" I.D. Hose to #10-32M

• Inline Swivel Connectors

- S44 1/8" I.D. Hose to 1/8" I.D. Hose
- ST4 1/8" I.D. Hose to #10-32M
- S4F 1/8" I.D. Hose to #10-32F

Part No.	Description
<u>17555-SF1</u>	Slip-On Fittings Kit

Minimatic Fittings Kit



Contains:

- 1/8" NPT to #10-32 Elbow [15090-1](#)
- #10-32 Elbow Fitting [15002-2](#)
- #10-32 Screw Plug [11755](#)
- #10-32 to 1/16" I.D. Hose Fitting [11752-2](#)

- #10-32 Extension Fitting [15010](#)
- 1/8" MNPT to 1/8" I.D. Hose Adapter [11924-1](#)
- Adjustable #10-32 Elbow Fitting [15002-1](#)
- #10-32 Cross Fitting [15002-4](#)
- Female #10-32 Hex Connector [15004](#)
- #10-32M to 1/8" I.D. Hose with Swivel [15045](#)
- 1/4" MNPT to #10-32F Adapter [4CQF](#)
- 1/8" NPT to #10-32 Tee [15090-2](#)
- #10-32 Tee Fitting [15002-3](#)
- #10-32M Short Coupling [11999](#)
- #10-32 to 1/8" I.D. Hose Fitting [11752-3](#)
- Gasket [11761-2](#)
- 12-Port Manifold [MAN-12](#)
- Clippard 1/4" & 5/16" Wrench [11770](#)
- 1/8" MNPT to #10-32F Adapter [2CPF](#)

Part No.	Description
17555	Minimatic Fittings Kit

Minimatic Quick Connect Fittings Kit



Contains:

- 1/8" I.D. Tee Connector [T44-4](#)
- Panel Mount #10-32F Cap [MIQC-CPF](#)
- Panel Mount 1/8" I.D. Hose Cap [MJQC-CPB](#)

- 3/8-24 Nuts [0107-48](#)
- Lockwasher [0302-43](#)
- 1/8" NPTF Valve [MIQC-VFP](#)
- 1/4" NPTM Valve [MIQC-VMQ](#)
- 1/8" NPTM Valve [MIQC-VMP](#)
- 1/8" NPTM Cap [MIQC-CMP](#)
- 1/4" NPTM Cap [MIQC-CMQ](#)
- 1/8" I.D. Hose Valve [MIQC-VB4](#)
- Panel Mount #10-32F Valve [MIQC-VFT](#)
- Panel Mount #10-32M Valve [MIQC-VMT](#)
- #10-32F Cap [MIQC-CFT](#)
- 1/8" I.D. Hose Cap [MIQC-CB4](#)
- Gasket [11761-2](#)
- Hose Samples
- Clippard 1/4" & 5/16" Wrench [11770](#)
- #10-32M to 1/8" I.D. [CT4](#)
- UTO-4 [UT0-4004](#)

Part No.	Description
17555-QC1	Quick Connect Fittings Kit



HOSE & TUBING

hose \`hōz \ n : a flexible tube for conveying gases or fluids

tubing \`t(y)u-bing \ n : a stiff material in the form of a tube used for conveying gases or fluids

Do you use a garden tube?

The answer to the question of whether to call it a tube or a hose rests on a fine line, one many people have gotten tangled up in. In both definitions it clearly states that a tube and a hose are used for conveying fluids, yet sometimes one word seems to fit the situation (and the application) better than the other. So remember...

*It's a hose when it's flexible
and a tube when it's not.*

Clippard offers a variety of miniature hose and tubing from copper and nylon tubing to flexible urethane, vinyl and Buna-N hose. The chart below lists these products and their available colors and lengths.





Hose or Tubing Type	Size: O.D. x I.D.	Colors: Solid	Translucent
NYT1 - Single Nylon Tubing	0402 - 1/8" x 1/16"	BLS - Blue	BLT - Blue
VYH1 - Single Vinyl Hose	0403 - 1/8" x 3/32"	BKS - Black	CLT - Clear
VYH2 - Dual Vinyl Hose	0503 - 5/32" x 3/32"	BRS - Brown	GNT - Green
URH1 - Single 85 Duro. Polyurethane Hose	0804 - 1/4" x 1/8"	GNS - Green	PUT - Purple
URH2 - Dual 85 Duro. Polyurethane Hose	0805 - 1/4" x 0.160"	GYS - Gray	ORT - Orange
URH8 - Ribbon 85 Duro. Polyurethane Hose	1208 - 3/8" x 1/4"	NAS - Natural	RDT - Red
URT1 - Single 95 Duro. Polyurethane Tubing	1610 - 1/2" x 0.320"	ORS - Orange	YLT - Yellow
PET1 - Single Polyethylene Tubing		RDS - Red	02T - BLT/GNT/GYS/ORT/PUT/RDT/WHs/YLT (ribbon only)
	Metric Sizes	WHs - White	
	0604M - 6 mm x 4 mm	YLS - Yellow	
	0805M - 8 mm x 5 mm	01S - Gray/Black (dual only)	

Available Lengths
050 - 50' Roll
500 - 500' Spool

This chart is to be used as an explanation of our ordering system. See individual listings following this page for sizes and colors available.

1/8" O.D. Copper Tubing



Part No. **Description**
[3811-1-RL](#) Copper Tubing

Material: High pressure copper

Working Pressures: to 2,500 psig


Static Burst Pressure: over 10,000 psig

Lengths Available: 50'

Bend Radius: 3/8"

Use With: Ferrule tubing connectors: [3810-1](#), [3810-2](#), [11923](#)

3/32" I.D. Nylon Tubing

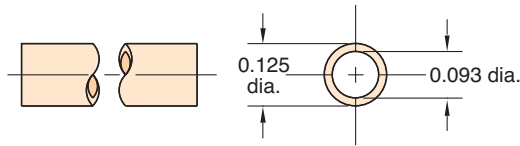

Part No.
[NYT1-0403-CLT](#)

Material: Semi-flexible nylon tubing

Color: Clear / Translucent

Working Range: to 250 psig

Static Burst Pressure: Approx. 1,000 psig


Use With: Ferrule tubing connectors: [11923](#), [3810-1](#), [3810-2](#)

Forming: May be formed into sharp corners with heat

Lengths Available: 50' and 500'

Bend Radius: 3/8"

1/16" I.D. 80A Vinyl Hose



Part No.
[VYH1-0402-CLT](#)

Note:
 Consult factory for custom colors

Type: Flexible, durable vinyl plastic hose

Working Range: 0 to 105 psig at 70°F maximum 60 psig at 80°F or above (max. temp. 100°F)

Use With: Hose fittings: [11752-2](#) and clamp [5000-4](#)


Bend Radius: 3x hose dia.

Color: Translucent: Clear

Lengths Available: 50' and 500'

Bend Radius: 3/8"

1/8" I.D. 80A Vinyl Hose



Part No.
[VYH1-0804-CLT](#)

Note:
 Consult factory for custom colors

Working Range: 0 to 105 psig at 70°F maximum 60 psig at 80°F or above (max. temp. 100°F)

Use With: Hose fittings: [11752-1](#), [11752-3](#) and [11924](#)
 Hose clamps: [5000-2](#)


Bend Radius: 3x hose dia.

Color: Translucent: Clear

Lengths Available: 50' and 500'

Bend Radius: 1/2"

1/8" I.D. Twin Vinyl Hose



Part No.
[VYH2-0804-GYS](#)

Type: Flexible, durable vinyl plastic hose, but two hoses molded together, one side has rib entire length for identification

Color: Solid: Gray/Gray

Use Clamp: [5000-1](#)

Working Range: 0 to 150 psig at 70°F maximum 60 psig at 80°F or above (max. temp. 100°F)

Use: Ideal for feeding supply in on one line and out on the other, reduces labor; makes neat assembly; may be parted with any sharp cutting edge


Lengths Available: 50' and 500'

Bend Radius: 1/2"



HOSE & TUBING

1/16" I.D. 85A Polyurethane Hose



Part No.

URH1-0402-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 500 psig at 70°F



Color: Solid: Black, brown, white, gray, orange
Translucent: Clear, blue, green, red, yellow

Lengths Available: 50' and 500'

Bend Radius: 3/16"

Note: In normal application hose clamps are not required with hose when used with Clippard hose barb fittings

1/16" I.D. 85A Polyurethane Ribbon Hose

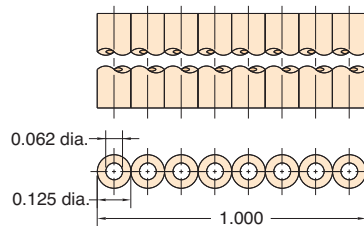

Part No.

URH8-0402-02T-050

Type: Flexible, durable urethane hose

Working Range: 0 to 105 psig at 100°F maximum 120°F

Static Burst Pressure: Over 500 psig at 70°F



Color: Solid: Gray, white
Translucent: Blue, green, orange, purple, red, yellow

Lengths Available: 50'

Bend Radius: 3/16"

Note: In normal application, hose clamps are not required with hose when used with Clippard hose barb fittings

1/8" I.D. 85A Polyurethane Hose



Part No.

URH1-0804-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Approximately 425 psig at 70°F


Color: Solid: Black, brown, white, gray, orange
Translucent: Clear, blue, green, red, yellow

Lengths Available: 50' and 500'

Bend Radius: 3/8"

Note: In normal application hose clamps are not required with hose when used with Clippard hose barb fittings

Twin 1/8" I.D. 85A Polyurethane Hose

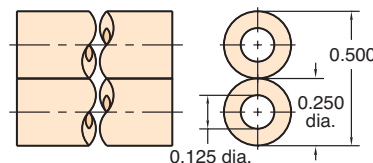

Part No.

URH2-0804-01S-□

Working Range: 0 to 105 psig at 100°F

Static Burst Pressure: Approximately 425 psig at 70°F

Color: Solid: Gray and black combination



Lengths Available: 50' and 500'

Bend Radius: 3/8"

Use: Ideal for feeding supply in on one line and out on the other; reduces labor; makes neat assembly; may be parted with any sharp cutting edge

Note: In normal application, hose clamps are not required with URH2-0804-01S hose when used with Clippard hose barb fittings

1/8" I.D. 85A Polyurethane Ribbon Hose

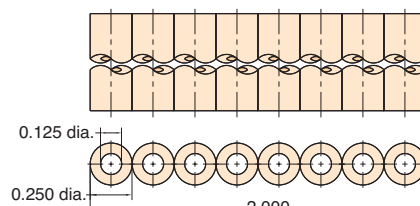

Part No.

URH8-0804-02T-050

Type: Flexible, durable urethane hose

Working Range: 0 to 105 psig at 100°F maximum 120°F

Static Burst Pressure: Over 500 psig at 70°F

Color: Solid: Gray, white
Translucent: Blue, green, orange, purple, red, yellow


Lengths Available: 50'

Bend Radius: 3/8"

Note: In normal application, hose clamps are not required with hose when used with Clippard hose barb fittings

5/32" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-0503-□□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 500 psig at 70°F

Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow


Lengths Available: 50' and 500'

Bend Radius: 3/8"

Note: Designed for use with push-in fittings.

6 mm O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-0604M-□□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 450 psig at 70°F

Color: Solid: Black
Translucent: Blue, clear, green, red



Lengths Available: 50' and 500'

Bend Radius: 1/2"

Note: Designed for use with push-in fittings.

1/4" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-0805-□□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 450 psig at 70°F

Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow


Lengths Available: 50' and 500'

Bend Radius: 1/2"

Note: Designed for use with push-in fittings.

8 mm O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-0805M-CLT-□

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 465 psig at 75°F

Color: Clear


Lengths Available: 50' and 500'

Bend Radius: 3/4"

Note: Designed for use with push-in fittings.

3/8" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-1208-□□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 440 psig at 75°F

Color: Solid: Black
Translucent: Blue, clear, green, red

Lengths Available: 50' and 500'

Bend Radius: 7/8"


Note: Designed for use with push-in fittings.



HOSE & TUBING

1/2" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing



Part No.

URT1-1610-CLT-□

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 420 psig at 75°F

Color: Clear


Lengths Available: 50' and 250'

Bend Radius: 1 1/8"

Note: Designed for use with push-in fittings.

5/32" O.D. 50D Polyethylene Tubing

Linear low density tubing



Part No.

PET1-0503-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, natural will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Over 540 psig at 75°F

Colors: Solid: Black or Natural


Lengths Available: 50' and 500'

Bend Radius: 1/2"

Note: Designed for use with push-in fittings.

6 mm O.D. 50D Polyethylene Tubing

Linear low density tubing



Part No.

PET1-0604M-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, natural will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Approximately 560 psig at 75°F

Colors: Solid: Black or Natural


Lengths Available: 50' and 500'

Bend Radius: 1 1/4"

Note: Designed for use with push-in fittings.

1/4" O.D. 50D Polyethylene Tubing

Linear low density tubing



Part No.

PET1-0805-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, natural will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Approximately 480 psig at 75°F

Colors: Solid: Black or Natural


Lengths Available: 50' and 500'

Bend Radius: 1 1/4"

Note: Designed for use with push-in fittings.

3/8" O.D. 50D Polyethylene Tubing

Linear low density tubing



Part No.

PET1-1208-□-□

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, natural will be furnished.

Working Range: 0 to 105 psig at 100°F Maximum 120°F

Static Burst Pressure: Approximately 600 psig at 75°F

Colors: Solid: Black or Natural

Lengths Available: 50' and 500'


Bend Radius: 2"

Note: Designed for use with push-in fittings.

Quick Set Hose Clamp



Type: Zinc plated steel
Use: 5000-1 with twin vinyl hose

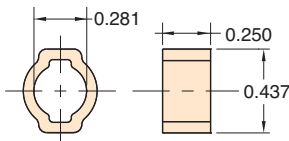


Part No. **Description**
5000-1 Hose Clamp

Quick Set Hose Clamp




Type: Zinc plated steel

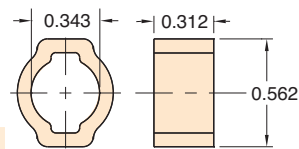

Part No. **Description**
5000-1A Hose Clamp

Reusable Hose Clamp

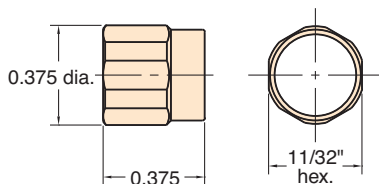

Part No. **Description**
5000-2 Hose Clamp

Material: Brass, self-threading, reusable


Use With: 11765 Buna-N hose VYH1-0804-CLT vinyl hose and Clippard hose fittings

Installation: Slip sleeve over hose, push onto fitting, then screw into place; tighten with wrench

Options: (-ENP)



Press-On Hose Clamp

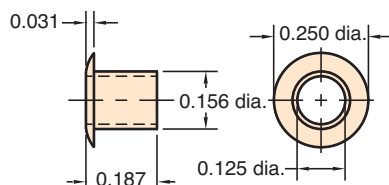

Part No. **Description**
5000-4 Hose Clamp

Material: Brass, press-on hose clamp

Use: for VYH1-0402-CLT hose 1/16" I.D. vinyl

Installation: Simply place hose clamp over hose with flange end out; then press hose partially onto fitting, then slide clamp back toward fitting to secure

Options: (-ENP)



Polyethylene vs Vinyl vs. Polyurethane

Polyurethane offers a wider range of chemical compatibility than Vinyl, it may be used at much higher temperatures and clamps are not needed when used with barb fittings. Linear low density polyethylene offers a lower cost alternative to polyurethane and superior environmental stress crack resistance over standard polyethylene. Both polyurethane and polyethylene are FDA approved.

Typical Hose & Tubing Bend Radii

When using hose or tubing, care should always be taken to avoid sharp bends to prevent compressing the inside diameter of the hose or tubing and restricting flow. For extremely close connections, allow a short loop of hose to avoid crimping.

Clippard Hose & Tubing		I.D.	O.D.	Min. Bend Radius
3811-1-RL	Copper Tube	1/16"	1/8"	3/8"
NYT1-XXX	Nylon Tubing	3/32"	1/8"	3/8"
VYH1-XXX	80A Duro. Vinyl Hose	1/16"	1/8"	3/8"
VYH1-XXX	80A Duro. Vinyl Hose	1/8"	1/4"	1/2"
VYH2-XXX	Dual Vinyl Hose	1/8"	1/4"	1/2"
URH1-XXX	85A Duro. Polyurethane Hose	1/16"	1/8"	3/16"
URH8-XXX	Ribbon 85A Duro. Polyurethane	1/16"	1/8"	3/16"
URH1-XXX	85A Duro. Polyurethane Hose	1/8"	1/4"	3/8"
URH2-XXX	Dual 85A Duro. Polyurethane	1/8"	1/4"	3/8"
URH8-0804-XXX	Ribbon 85A Duro. Polyurethane	1/8"	1/4"	3/8"
URT1-0503-XXX	95A Duro. Polyurethane Tubing	3/32"	5/32"	3/8"
URT1-0604M-XXX	95A Duro. Polyurethane Tubing	4 mm	6 mm	1/2"
URT1-0805-XXX	95A Duro. Polyurethane Tubing	0.160"	1/4"	1/2"
URT1-0805M-CLT	95A Duro. Polyurethane Tubing	5 mm	8 mm	3/4"
URT1-1208-XXX	95A Duro. Polyurethane Tubing	0.245"	3/8"	7/8"
URT1-1610-XXX	95A Duro. Polyurethane Tubing	0.320"	1/2"	1 1/8"
PET1-0503-XXX	50D Duro. Polyethylene Tubing	0.106"	5/32"	1/2"
PET1-0604M-XXX	50D Duro. Polyethylene Tubing	4 mm	6 mm	1 1/4"
PET1-0805-XXX	50D Duro. Polyethylene Tubing	0.170"	1/4"	1 1/4"
PET1-1208-XXX	50D Duro. Polyethylene Tubing	1/4"	3/8"	2"