


PATENTED



Serie **EUROFLY**

Articolo **600000**

Brass butterfly valve full bore, F/F threaded with throttling.

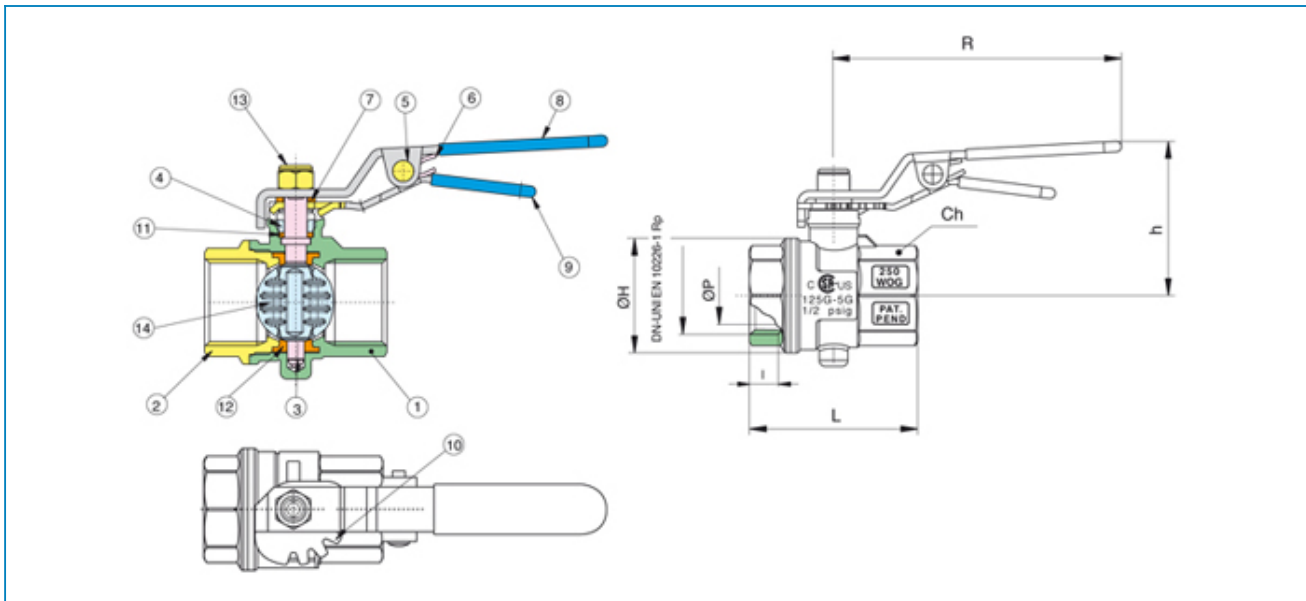

| POS. | PART NAME | MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL | N°P |
|------|-------------------|---|-----|
| 1 | BODY | OTTONE CW617N UNI EN 12165 | 1 |
| 2 | END CONNECTION | OTTONE CW617N UNI EN 12165 | 1 |
| 3 | STEM | OTTONE CW614N UNI EN 12164 | 1 |
| 4 | WASHER | OTTONE CW614N UNI EN 12164 | 1 |
| 5 | LOCK PIN | ACCIAIO | 1 |
| 6 | SPRING | ACCIAIO PER MOLLE | 1 |
| 7 | ANTIFRICTION SEAT | PTFE CARICATO GRAFITE | 1 |
| 8 | HANDLE | ACCIAIO DD11 UNI EN 10111 | 1 |
| 9 | HANDLE | ACCIAIO UNI EN 10111 | 1 |
| 10 | HALF TURN STOP | ACCIAIO UNI EN 10111 | 1 |
| 11 | STEM SEAL | PTFE | 1 |
| 12 | SEAT | EPDM | 1 |
| 13 | NUT | ACCIAIO CL 04 | 1 |
| 14 | DISC | PEI (ULTEM 1000) | 1 |

| MISURA SIZE | DN | BOX | MASTER BOX | CODICE CODE | ØP | I | Ch | ØH | L | h | R | Kv | PN | Kg |
|-------------|-----|-----|------------|-------------|-----|------|-----|------|-------|-------|-----|-------|----|------|
| 1/2" | 15 | 50 | 100 | 60000004 | 16 | 15 | 25 | 31 | 48,5 | 46,5 | 95 | 8,5 | 16 | 0,19 |
| 3/4" | 20 | 25 | 50 | 60000005 | 21 | 16,3 | 31 | 38 | 56 | 50,5 | 95 | 17 | 16 | 0,25 |
| 1" | 25 | 20 | 40 | 60000006 | 27 | 19,1 | 38 | 46 | 64 | 54 | 95 | 27 | 16 | 0,36 |
| 1"1/4 | 32 | 12 | 24 | 60000007 | 34 | 21,4 | 48 | 55,5 | 76 | 71,5 | 120 | 50 | 16 | 0,67 |
| 1"1/2 | 40 | 10 | 20 | 60000008 | 41 | 21,4 | 54 | 65,5 | 82 | 76,5 | 120 | 82,5 | 16 | 0,88 |
| 2" | 50 | 4 | 8 | 60000010 | 52 | 25,7 | 67 | 77,5 | 93 | 86,5 | 150 | 136,5 | 16 | 1,31 |
| 2"1/2 | 65 | 2 | 4 | 60000012 | 65 | 30,2 | 90 | 102 | 112 | 121 | 205 | 240 | 16 | 3,06 |
| 3" | 80 | - | 4 | 60000014 | 80 | 33,3 | 105 | 122 | 129,5 | 131,5 | 205 | 340 | 16 | 4,67 |
| 4" | 100 | - | 2 | 60000018 | 103 | 39,3 | 130 | 145 | 146 | 145 | 205 | 550 | 16 | 6,29 |

Limiti di temperatura: -10°C + 130°C - Temperature range: -10°C + 130°C.



**RUBINETTERIE
BRESCIANE**

