




Serie **WAFER ANSI300**

Articolo **720212**

STAILESS STEEL

Full bore flanged ball valve ANSI 300 metric.

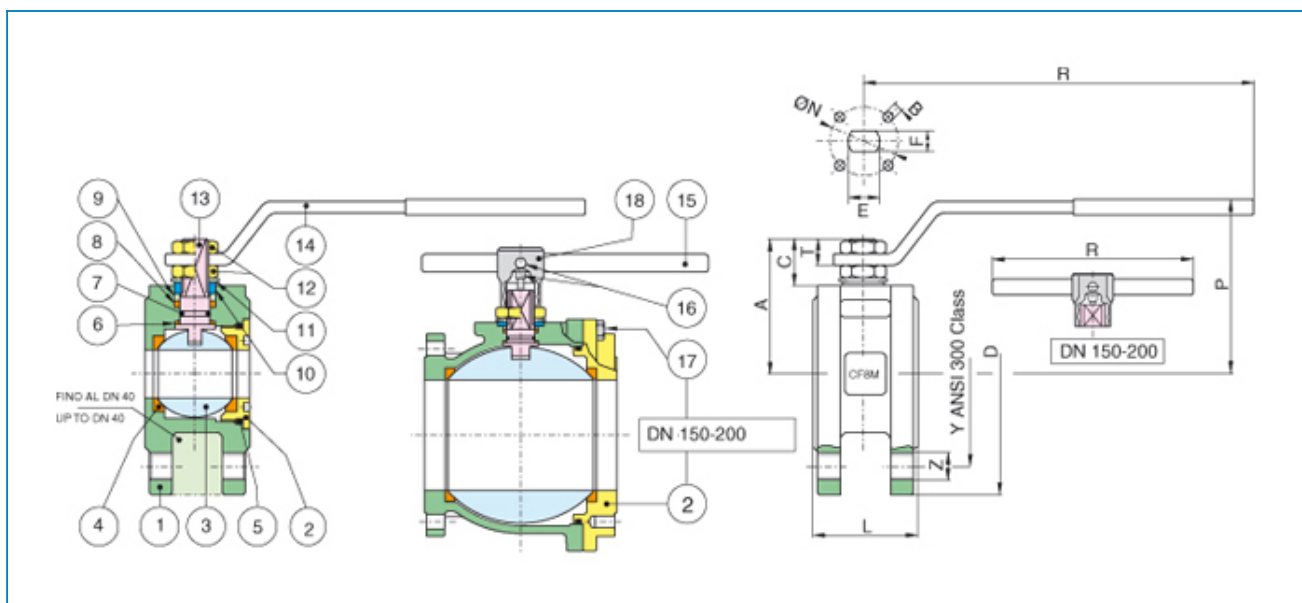

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M / A182-F316	1
2	END CONNECTION	A351-CF8M / A182-F316	1
3	BALL	A351-CF8M / A182-F316	1
4	BALL SEAT	P.T.F.E.+GLASS	2
5	O-RING	FKM (VITON®)	1
6	THRUST WASHER	P.T.F.E.	1
7	O-RING	FKM (VITON®)	1
8	STEM SEAT	P.T.F.E.	1
9	PACKING GLAND	CARBON STEEL	1
10	END STOP	INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN200)	2-1
11	SPRING WASHER	CARBON STEEL	2
12	NUT	CARBON STEEL	2
13	STEM	A182-F316	1
14	HANDLE	CARBON STEEL	1
15	HANDLE DN 150-200	CARBON STEEL	1
16	SCREW	CARBON STEEL	1
17	SCREW	CARBON STEEL	8-12
18	BODY HANDLE DN 150-200	EN-GJL-250	1

MISURA SIZE	DN	D	Y	Z	L	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,5	4 x M14	35	131	65	47	11,5	8,5	10	7	32	4 X M5	16,3	50	1,40
3/4"	20	120	82,5	4 x M18	40	131	69	51,5	9,5	8,5	10	7	32	4 X M5	29,5	50	2,50
1"	25	120	89	4 x M18	46	174	80	61	13	11,5	12	8	42	4 X M5	43	50	3,10
1"1/4	32	130	98,5	4 x M18	54	174	84	64,5	16,5	11,5	12	8	42	4 X M5	89	50	4,20
1"1/2	40	150	114,5	4 x M20	63,5	250	102	78	20,5	12	16	10	50	4 XM6	230	50	6,70
2"	50	165	127	8 X M18	82	250	111	87	16	12	16	10	50	4 XM6	265	50	10,40
2"1/2	65	190	149	8 X M20	103	321	128	104,5	18,5	17	20	14	70	4 X M8	540	50	17,70
3"	80	210	168,5	8 X M20	122	321	138	115	21	18	20	14	70	4 X M8	873	50	24,80
4"	100	254	200	8 X M20	152	381	156	137	23,5	21	24	18	102	4 X M10	1390	50	45,30
6"	150	320	270	12 X M20	232	700	266	201,5	51,5	30	42	30	125	4 X M12	2024	50	101,00
8"	200	380	330	12 X M24	317	700	310	245	51,5	30	42	30	125	4 X M12	2720	50*	122,00

* delta p 16 bar