




Serie **SPLIT-BODY ANSI300**

Articolo **761030**

**STAINLESS STEEL**

Flanged ANSI 300 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

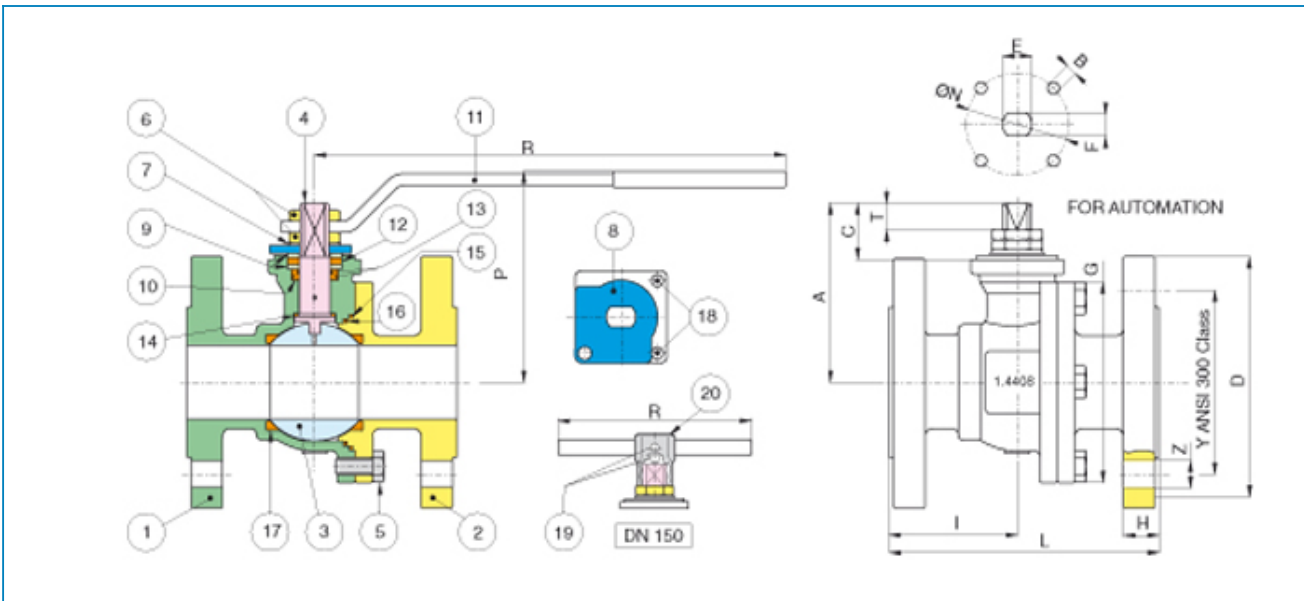

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	STAINLESS STEEL DN15 - DN40 STAINLESS STEEL DN50 - DN150	4-8-12
6	NUT	STAINLESS STEEL DN15 - DN100 STAINLESS STEEL DN150	1-2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+ Glass	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	2
20	BODY HANDLE DN150	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,5	4 X Ø16	14,5	61,5	140	85	131	88	52	19	8	M10	7	42-F04	M5	16,3	50	2,30
3/4"	20	115	82,5	4 X Ø19	16	61	152	78	131	93	56	19	8	M10	7	42-F04	M5	29,5	50	3,50
1"	25	125	89	4 X Ø20	17,5	70,5	165	96	174	109	72,5	27,5	13	M12	8	50-F05	M6	43	50	5,20
1"1/2	40	155	114,5	4 X Ø22	21	78,5	190	126	250	133	107	30	10	M16	10	50-F05	M6	230	50	10,00
2"	50	165	127	8 X Ø20	22,5	86	216	136,5	321	144	122	38,5	18	M20	14	70-F07	M8	265	50	12,00
3"	80	210	168,5	8 X Ø22	29	81	283	178,5	381	173	151	43	18	M24	18	102-F10	M10	873	50	27,00
4"	100	255	200	8 X Ø22	32	88,5	305	219	381	187	165	43	18	M24	18	102-F10	M10	1390	50	41,00
6"	150	320	270	12 X Ø23	37	172	403	306	700	305	245	68	27,5	M42	30	125-F12	M12	2024	50	93,00
8" *	200	381	330	12 X Ø26	41,5	251	502	410	700	348	288	68,5	27,5	M42	30	125-F12	M12	2720	50	151,00

\* TRUNNION &#8710;p=25 bar