


Serie **EURO-SFER**

Articolo **750000**

**EN-GJL 250**

Flanged PN16 cast iron ball valve, Venturi metric bore, EN 558 basic serie 14.

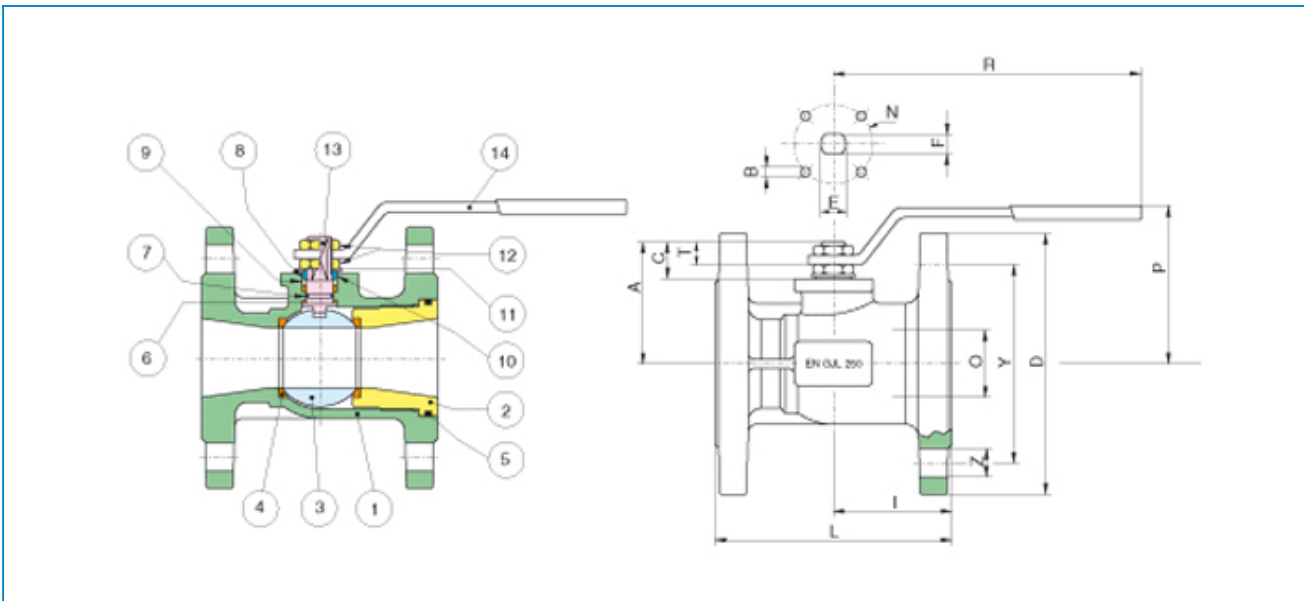

Limiti di temperatura: -10° +120° - Temperature range: -10° +120° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

| POS. | PART NAME      | MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL      | N°P |
|------|----------------|--|-----|
| 1    | BODY           | EN-GJL-250   | 1   |
| 2    | END CONNECTION | ASTM A105  | 1   |
| 3    | BALL           | CW 617 UNI EN 12165                                    | 1   |
| 4    | BALL SEAT      | P.T.F.E.   | 2   |
| 5    | O-RING         | NBR  | 1   |
| 6    | THRUST WASHER  | P.T.F.E.   | 1   |
| 7    | O-RING         | NBR  | 1   |
| 8    | STEM SEAT      | P.T.F.E.   | 1   |
| 9    | PACKING GLAND  | CARBON STEEL   | 1   |
| 10   | END STOP       | INOX AISI 430 (DN50 - DN65) CARBON STEEL DN80 - DN125) | 2 1 |
| 11   | SPRING WASHER  | CARBON STEEL   | 2   |
| 12   | NUT            | CARBON STEEL   | 2   |
| 13   | STEM           | A182 - F304  | 1   |
| 14   | HANDLE         | CARBON STEEL   | 1   |

| MISURA SIZE | DN  | O    | D   | Y   | Z       | I   | L   | R   | P   | A     | C  | T    | E  | F  | ØN  | B   | Kv   | PN | Kg    |
|-------------|-----|------|-----|-----|---------|-----|-----|-----|-----|-------|----|------|----|----|-----|-----|------|----|-------|
| 2"          | 50  | 38   | 165 | 125 | 4 X Ø18 | 75  | 150 | 250 | 103 | 78,5  | 24 | 12,5 | 16 | 10 | 50  | M6  | 180  | 16 | 7,70  |
| 2"1/2       | 65  | 50,2 | 185 | 145 | 4 X Ø18 | 85  | 170 | 250 | 112 | 86,5  | 23 | 11,5 | 16 | 10 | 50  | M6  | 390  | 16 | 10,20 |
| 3"          | 80  | 64   | 200 | 160 | 8 X Ø18 | 90  | 180 | 321 | 128 | 105   | 29 | 18   | 20 | 14 | 70  | M8  | 600  | 16 | 13,10 |
| 4"          | 100 | 76   | 220 | 180 | 8 X Ø18 | 95  | 190 | 321 | 138 | 114,5 | 29 | 18   | 20 | 14 | 70  | M8  | 750  | 16 | 17,00 |
| 5"          | 125 | 95   | 250 | 210 | 8 X Ø18 | 100 | 200 | 381 | 157 | 137,5 | 33 | 21   | 24 | 18 | 102 | M10 | 1060 | 16 | 24,80 |