



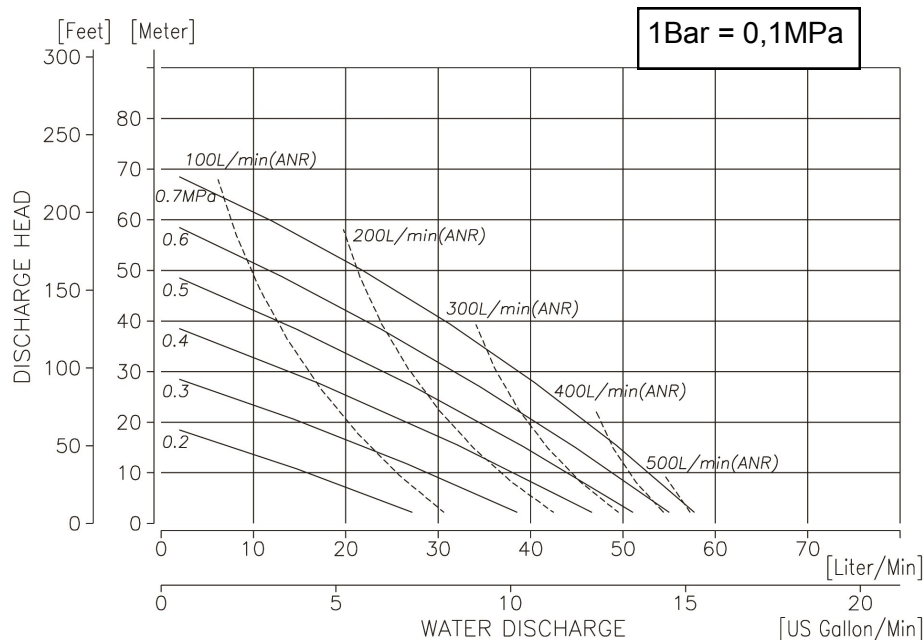

TECHNICAL DATA				Pump type G15AT			
Air supply pressure		0,2-0,7	MPa	Max. viscosity (neg. suc.)		500	Cp
Max. discharge volume/cycle		160	ml	Max. viscosity (flooded suction.)		500	Cp
Max. discharge volume		58	L/min	Max. air consumption		510	NL/min
Max. discharge pressure		0,7	MPa	Max. noise level		80,5	dB(a)
Max. size of solids		1	mm	Operating temp. ambient		0-70	°C
Max. suction lift dry	PTFE fitted			Max operating temp. fluid			
Max. suction lift wet	PTFE fitted			Diaphragm compound	PTFE	0-100	°C
Max. fluid inlet pressure	PTFE fitted	0,05	Mpa	Diaphragm compound			
Max. suction lift dry	Rubber fitted			Diaphragm compound			
Max. suction lift wet	Rubber fitted						
Max. fluid inlet pressure	Rubber fitted			Net Weight	Type A	ALU	5,4 Kg
Caution! Data based on water (1 Cp) under ambient temperature							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

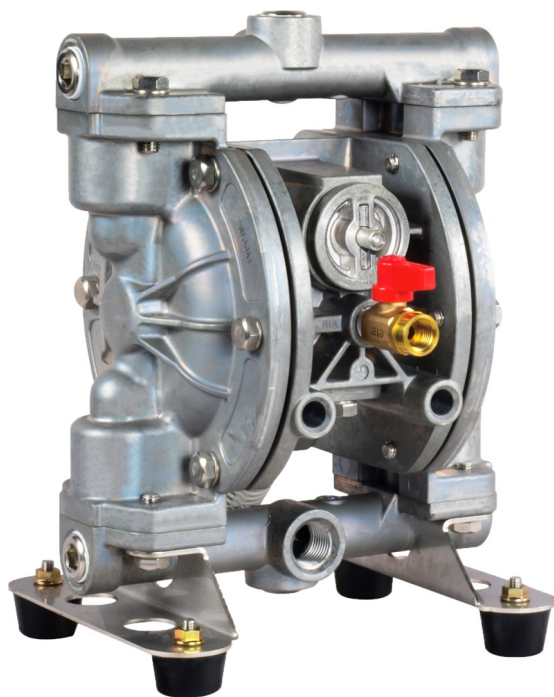