




Serie **EXPO**

Articolo **300100**

Pressure reducing and regulating valve with balanced seat, outlet setting from 0,5 to 6 bar, F/F threaded connections.

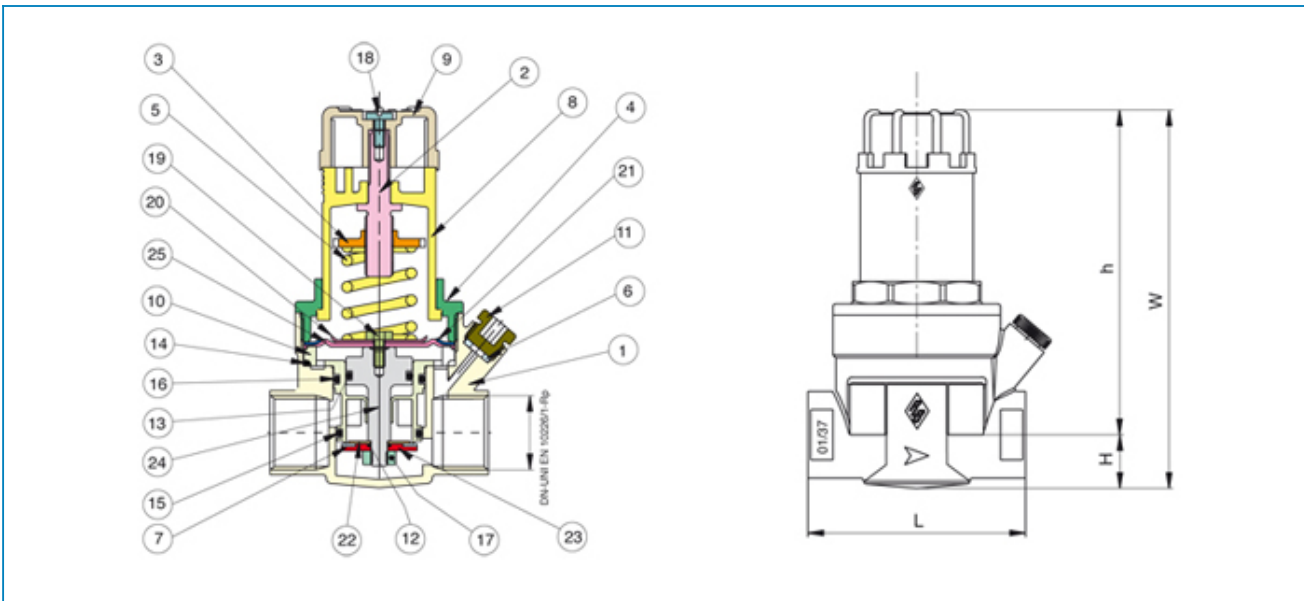

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	REGULATING STEM	OTTONE CW614N UNI EN 12164	1
3	REGULATING RING	OTTONE CW614N UNI EN 12164	1
4	LOCKING RING NUT	OTTONE CW617N UNI EN 12165	1
5	SPRING	ACCIAIO C85 CL C UNI 10083	1
6	FLAT SEAT	NBR	1
7	FLAT SEAT	EPDM	1
8	CAP	PPA	1
9	WHEEL HANDLE	ABS	1
10	SUPPORT	PPA	1
11	PRESSURE GAUGE CAP	POM	1
12	O-RING	NBR	1
13	O-RING	NBR	1
14	O-RING	NBR	1
15	O-RING	NBR	1
16	O-RING	NBR	1
17	NUT	ACCIAIO INOX A2 UNI 5588	1
18	SCREW	FERRO	1
19	SCREW	ACCIAIO	1
20	EXPANDER WASHER	ACCIAIO DC04 UNI EN 10020	1
21	WASHER	ACCIAIO DC04 UNI EN 10020	1
22	WASHER	OTTONE CW614N UNI EN 12164	1
23	WASHER	OTTONE CW614N UNI EN 12164	1
24	OBSTRUCTOR	OTTONE CW617N UNI EN 12165	1
25	MEMBRANE	NBR	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	W	h	H	L	Kv	PN	Kg
3/8"	10	1	16	30010003	122	105	17,5	68	2,5	40	0,55
1/2"	15	1	16	30010004	122	105	17,5	68	2,5	40	0,54
3/4"	20	1	16	30010005	134	116,5	17,5	78	3,5	40	0,80
1"	25	1	16	30010006	136,5	116,5	20	81	5,8	40	0,90

Limiti di temperatura per aria : -10°C +70°C - Limiti di temperatura per acqua : -10°C +85°C - Temperature range for air: -10°C +70°C - Temperature range for water: -10°C +85°C.